



Water Coolers



RADII™ MODULAR FOUNTAIN

ML110R

Suggested Specification

Model ML110R shall include a push pad to activate the flow of water. Fountain shall be designed to eliminate splashing and standing water. Bubbler shall have flexible guard and operate between 20 and 120 PSI. Shall comply with the Safe Drinking Water Act and Lead Contamination Control Act. Shall comply with ANSI/NSF 61.

Model

ML110R - A light press of the push pad activates the flow of water.

Standard Features

- > Built-in 100 micron strainer stops particles before they enter the waterway
- > Flexible bubbler guard
- > Waterways are Lead-Free in Materials & Construction
- > Brushed Stainless Steel Finish
- > Heavy duty galvanized steel wall mounting frame
- > Limited 1-Year Warranty

Finishes

- > Standard Finish: Stainless Steel
- > Optional Finish (at additional cost): Regency Bronze

Options (at additional cost)

- > Stainless steel bubbler

Installation

- > Prior to roughing-in, consult local, state and federal codes for proper mounting height.
- > Wall mounting frame is furnished for easy installation

Net Weight

- > Net weight approximately 34 lbs.



Components in this cooler are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

Limited 1-Year Warranty (Continental limits of the United States and Canada): One year from date of installation on parts only. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Export Warranty: One year on component parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Water coolers are classified by Underwriters' Laboratories Inc. in accordance with ANSI/NSF 61. Models covered by this specification comply with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards.




Certified to
NSF/ANSI 61/Section 9

OASIS™ RADII™ MODULAR DRINKING FOUNTAIN MODEL ML110R

ROUGHING-IN AND DIMENSIONAL DRAWING



FLOW REGULATOR ACCESS THROUGH HOLE IN PUSH PAD

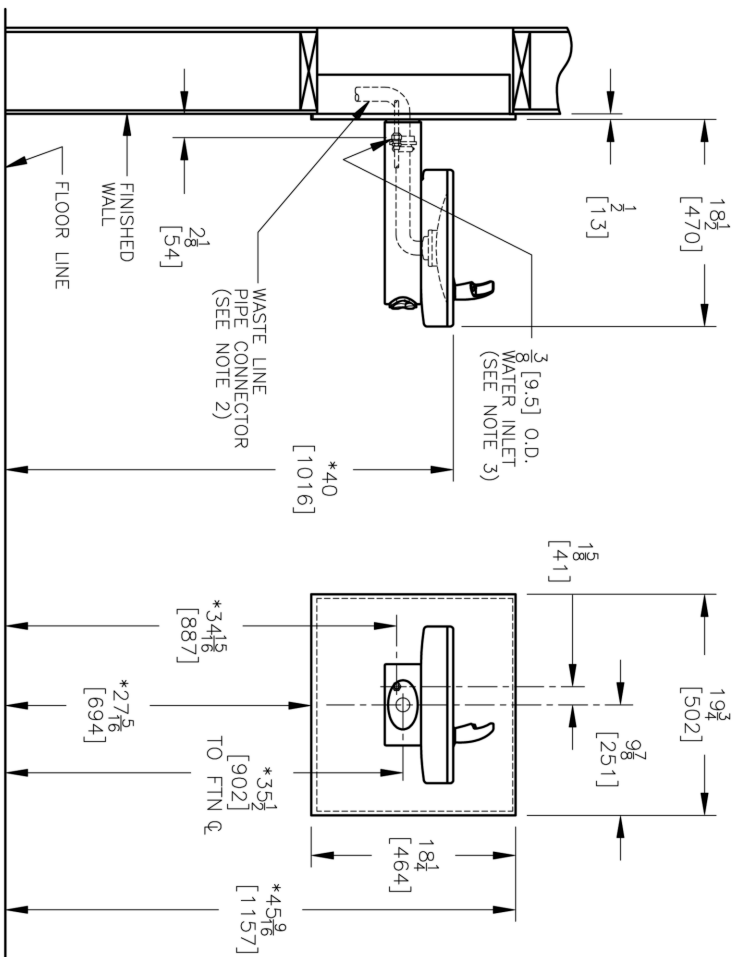

NOTES:

1. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQUIRED TO COMPLY WITH FEDERAL, STATE AND LOCAL CODES.
2. STOP VALVE, TRAP, PIPE CONNECTOR TO WASTE LINE NOT PROVIDED WITH UNIT. 2[51] PROJECTION OF 1 1/4[38] OR 1 1/2[32] PIPE STUB FOR 1 1/4(32) O.D. WASTE LINE REQUIRED.
3. 2[51] PROJECTION OF 3/8[9.5] O.D. WATER SUPPLY TUBE REQUIRED.
4. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.

WALL OPENING & ASSEMBLY

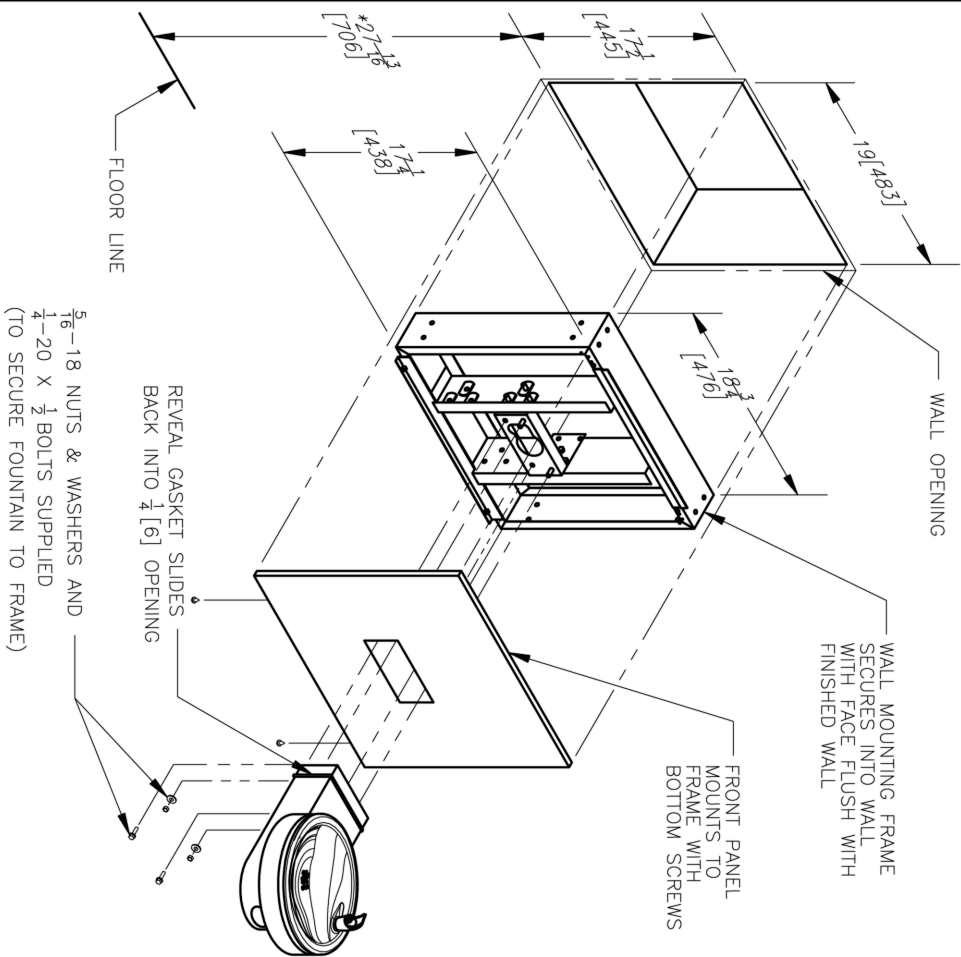

THIRD ANGLE PROJECTION
ROUGHING-IN AND DIMENSIONAL DRAWING