



# Water Coolers



## AQUA POINTE™

SPORTS BOTTLE FILLER

MWSMSBF, MWSM8SBF,  
MWSM12SBF

### Suggested Specification

Model MWSM8SBF shall deliver 8.0 gph of 50°F water at 90°F ambient and 80°F inlet water. Model MWSM12SBF shall deliver 12.0 gph of 50°F water at 90°F ambient and 80°F inlet water. Model MWSMSBF is a non-refrigerated Bottle Filler and delivers ambient water. Water flow to the bottle filler is by means of an electrically activated solenoid push-button water valve. Key AquaPointe bottle filler molded components contain Freshield, WHICH UTILIZES a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discoloration, odors and degradation. Basin shall be designed to eliminate splashing and standing water. Cooling system shall use R-134a refrigerant. Shall comply with ANSI A117.1 and ADA. Shall be listed by Underwriters' Laboratories to U.S. and Canadian standards. Shall comply with ANSI/NSF 61.

### Models

**MWSM8SBF** delivers 8.0 gallons of chilled drinking water per hour.  
**MWSM12SBF** delivers 12.0 gallons of chilled drinking water per hour.  
**MWSMSBF** is a non-refrigerated bottle filler. These models satisfy CABO/ANSI A117.1.

### Standard Features


- > Built-in 100 micron strainer stops particles before they enter the waterway
- > Waterways are Lead-free in Materials & Construction
- > Heavy Duty steel frame
- > Product Certified by NSF to NSF/ANSI Standard 61, including AB1953; except for the Green Filter System, which has been tested by independent laboratories to the NSF Standard 42, and 53, but not certified by NSF
- > High Efficiency cooling tank and coil
- > Refrigerant R-134a

### Finishes

- > Standard Cabinet Finish: Brushed Stainless Steel
- > Optional finishes: Regency Bronze

### Options (at additional cost)

- > Ultra Violet filtration
- > Oasis Green Filtration System



### Installation

- > Prior to installing, consult with local, state and federal codes for proper mounting height
  - > Shipped with complete instructions and wall mounting bracket
  - > Removable front panels allow for easy access to filtration and refrigeration unit
- Note: chiller units sold with these models must be remotely located, as they do not fit into the housing of the unit, or inside the wall cavity of a typical stud wall.



ADA Compliant for reach ranges. These models meet guidelines for children's (ages 5 and up) accessibility providing the floor to button height is less than 40 inches and proper clear floor space is provided for frontal approach.



Components in this fountain are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

Product Certified to NSF/ANSI Standard 61, Annex G (weighted average lead content of <=0.25%) and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953). Units incorporating the Green Filter option are not NSF approved. However, the Green Filter has been independently tested to the NSF standards 42 and 53.


Models covered by this specification comply with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards.

| Model     | 50° F Drinking Water<br>90° F Ambient Air Temp* |                  | 115 Volts, 60 HZ |                   |                | Cabinet<br>Color Finish | Net Wt.<br>Approx. |
|-----------|---|------------------|------------------|-------------------|----------------|-------------------------|--------------------|
|           | Rated Capacity<br>GPH                           | Base Rate<br>GPH | Compr.<br>HP     | Full Load<br>Amps | Rated<br>Watts |                         |                    |
| MWSMSBF   |   |                  |                  |                   |                | Yes                     | 36 Lbs.            |
| MWSM8SBF  | 8.0   | 8.0              | 1/4              | 4.8               | 550            | Yes                     | 80 Lbs.            |
| MWSM12SBF | 12.0  | 12.0             | 1/3              | 5.4               | 620            | Yes                     | 80 Lbs.            |


\*Industry Standard Rating Condition 80° F inlet water temperature.

Specifications subject to change without notice


OASIS® SPORTS BOTTLE FILLER MODEL MWMSMBF, MWMS8SBF, MWSM12SBF

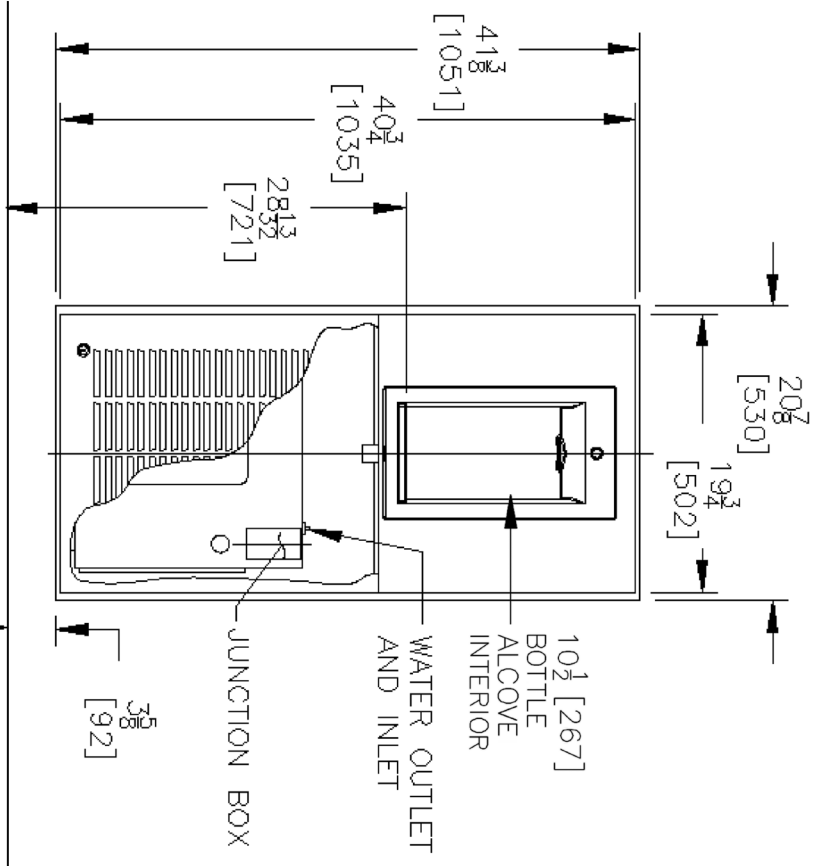

- NOTES:**
1. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQUIRED TO COMPLY WITH FEDERAL, STATE AND LOCAL CODES.
  2. STOP VALVE, TRAP, PIPE CONNECTOR TO WASTE LINE NOT PROVIDED.
  3. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.



**TRIM BEZEL INSTALLATION**

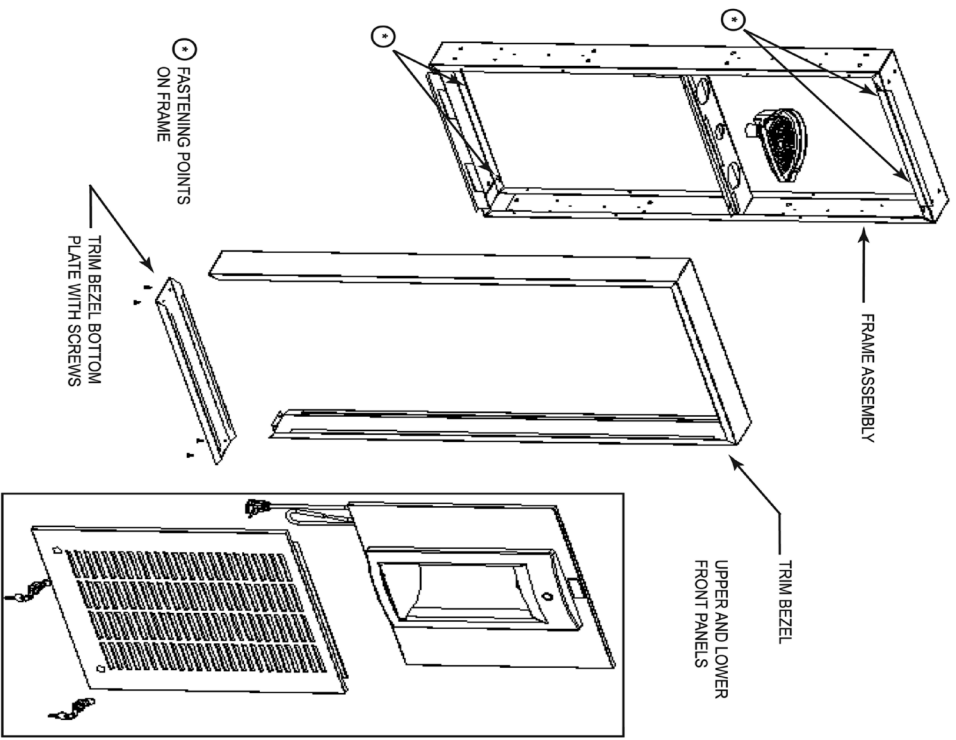

- INSTALL FRAME ASSEMBLY TO A FLAT SURFACE. USE APPROPRIATE FASTENING HARDWARE (NOT INCLUDED). REFER TO THE FIRST TWO PAGES OF THIS INSTRUCTION PACKAGE FOR CORRECT INSTALLATION HEIGHT.
- REMOVE BOTTOM PLATE FROM TRIM BEZEL (4 SCREWS).
- INSTALL TRIM BEZEL TO FRAME ASSEMBLY AND REPLACE BOTTOM PLATE WITH SCREWS.
- INSTALL DRAIN ASSEMBLY, SNAP BUSHINGS AND ANY OTHER ACCESSORIES INCLUDED WITH THIS KIT.
- INSTALL UPPER AND LOWER FRONT PANEL.