



# Water Coolers



## SEMI-RECESSED

## PLF8S, PLF14S

### Models

**PLF8S** delivers 8.0 gph of chilled drinking water.  
**PLF14S** delivers 14.0 gph of chilled drinking water.

### Standard Features

- > Waterways are Lead-Free in Materials & Construction
- > Dial-A-Drink® Bubbler
- > Stainless Steel Top
- > Welded, Heavy-Gauge Steel Frame
- > High-Efficiency Cooling Tank and Coil
- > Refrigerant R-134a
- > Limited 5-year Warranty

### Finishes

- > Standard Cabinet Finish: Sandstone Powder Coat
- > Optional finishes at no extra cost: Graystone Powder Coat
- > Optional finishes at extra cost: Stainless Steel, Regency Bronze

### Accessories

- > Carafe/Glass Fillers (Factory Installed)  
 Models: PLF8S/PLF14S (030239-002)



Components in these water coolers are lead free as defined by the Safe Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

### Installation

- > Prior to roughing-in consult with local, state, and federal codes
- > Shipped with complete instructions
- > Removable panels provide easy access for installation

**Limited 5-Year Warranty** (Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

**Export Warranty:** One year on sealed refrigeration system and most components parts. Four-year replacement contract on sealed refrigeration system. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Product Certified to NSF/ANSI Standard 61, Annex G (weighted average lead content of  $\leq 0.25\%$ ) and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953).

Models covered by these specifications comply with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian Safety Standards.




Certified to NSF/ANSI 61-G

Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot'N Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PLF8S	8.0	8.0	No	No	1/5	4.6	500	Yes	Yes	71 Lbs.
PLF14S	14.0	8.0	Yes	No	1/5	4.6	500	Yes	Yes	77 Lbs.

\*Industry Standard Rating Condition 80° F inlet water temperature.

Specifications subject to change without notice

OASIS™ SEMI-RECESSED WATER COOLER MODELS PLF85, PLF145

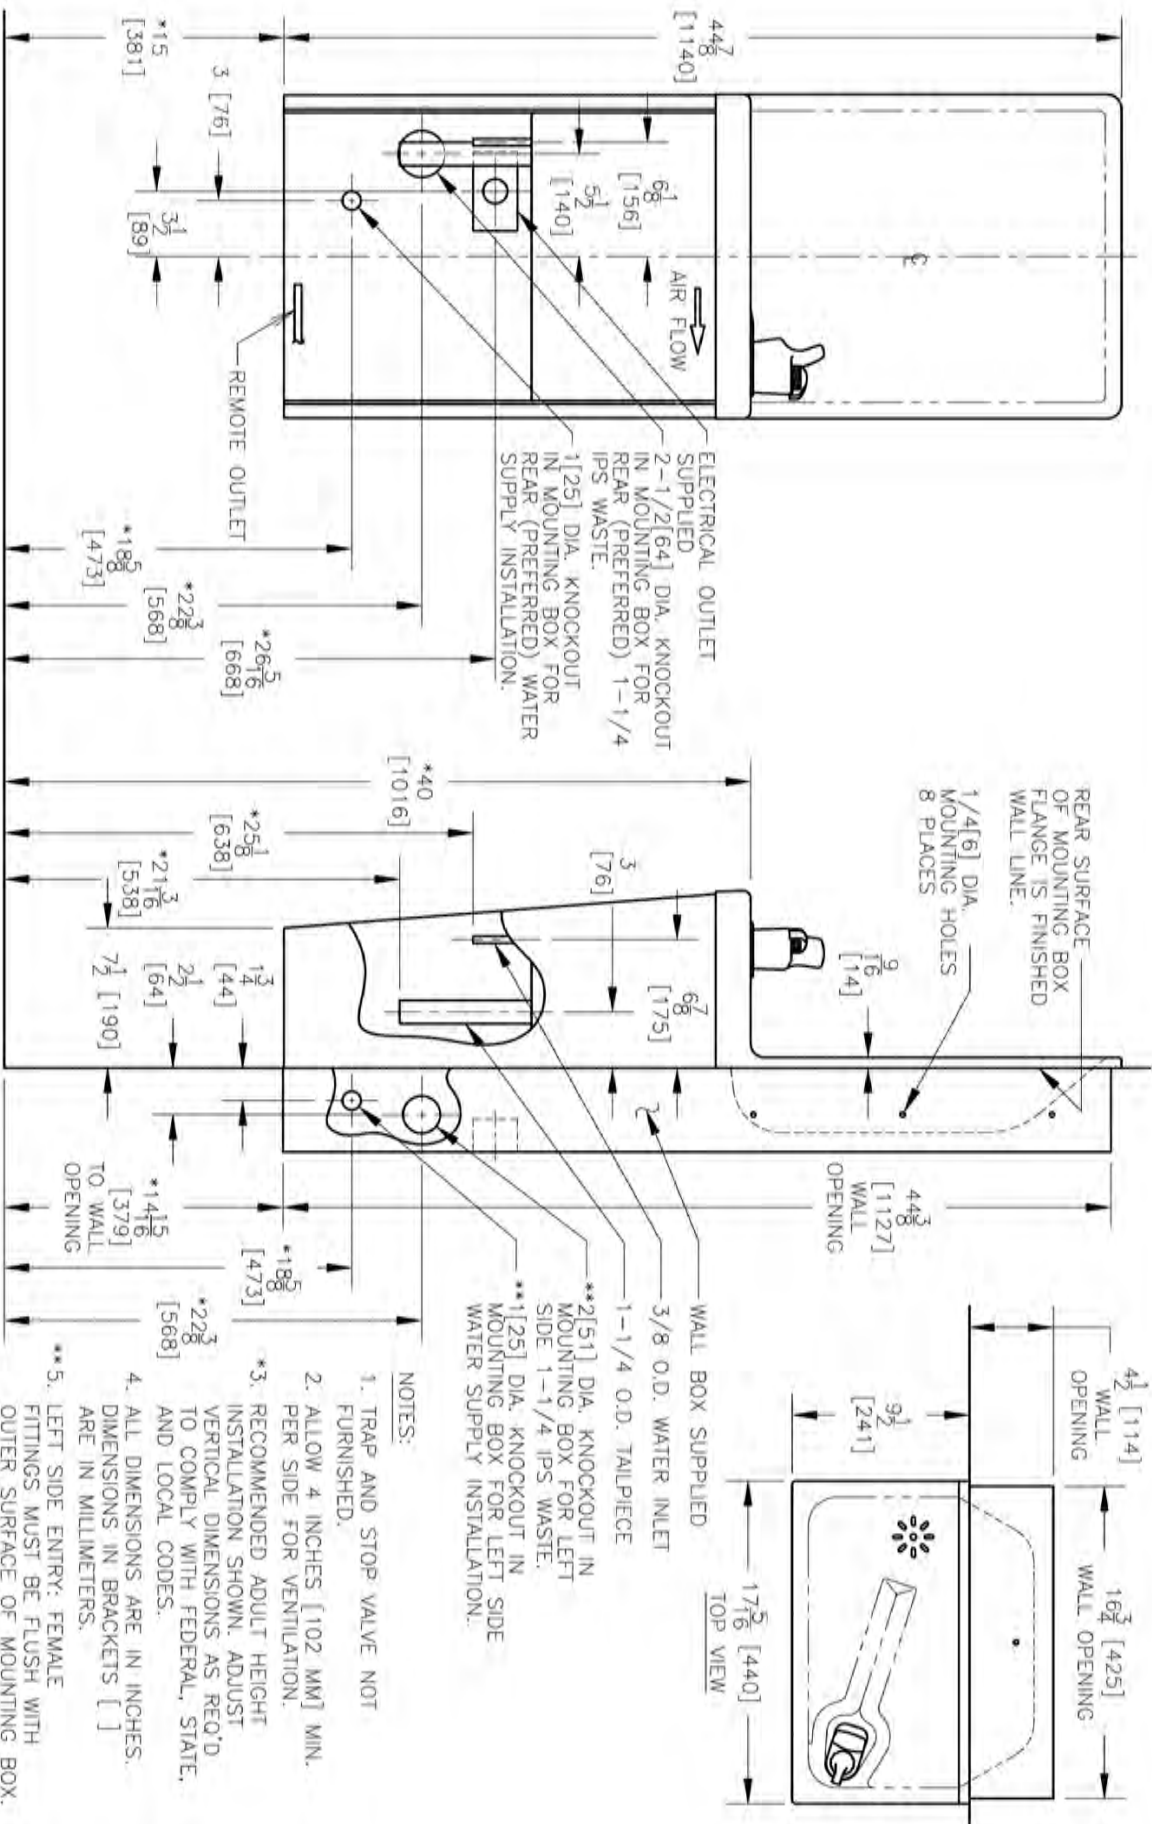

- NOTES:
1. TRAP AND STOP VALVE NOT FURNISHED.
  2. ALLOW 4 INCHES [102 MM] MIN. PER SIDE FOR VENTILATION.
  3. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQ'D TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.
  4. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.
  5. LEFT SIDE ENTRY: FEMALE FITTINGS MUST BE FLUSH WITH OUTER SURFACE OF MOUNTING BOX.

