

BARRIER-FREE

PLF8SKTP

Suggested Specification

Model PLF8SKTP shall deliver 8.0 gph of 50° F degree water at 90° F ambient and 80° F inlet water. Model PLF8SKTP features push buttons on the front and both sides of the cabinet. Water flows as long as a button is depressed. Cabinet finish shall be Sandstone powder coated paint on galvanized steel or brushed stainless steel. Cooling system shall use R-134a refrigerant. Shall comply with ANSI A117.1. When these coolers are properly installed, they allow your facility to comply with ADA requirements. Shall be listed by Underwriters' Laboratories to U.S. and Canadian standards and conform to European Union Directives.

Model

PLF8SKTP features push buttons on the front and both sides of the cabinet. This model satisfies ANSI A117.1. When this cooler is properly installed, it will allow your facility to comply with ADA requirements.

Standard Features

- > Waterways are Lead-Free in Materials & Construction
- > Stainless Steel top
- > Welded, Heavy-Gauge Steel Frame
- > High-Efficiency Cooling Tank and Coil
- > Refrigerant R-134a
- > Limited 5-year Warranty

Finishes

- > Standard Cabinet Finish: Sandstone powder coated paint on Galvanized steel.
- > Optional finishes (at extra cost): Stainless Steel, Regency Bronze.



Components in these water coolers are lead free as defined by the Safe Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.



ADA Compliant



Sandstone Powder Coat Finish



Brushed Stainless Steel

Installation

- > Prior to roughing-in consult with local, state, and federal codes for proper mounting height.
- > Shipped with complete instructions and wall mounting bracket.
- > Removable panels provide easy access for installation.

Limited 5-Year Warranty (Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.


Export Warranty: One year on the sealed refrigeration system and most components parts. Four-year replacement contract on sealed refrigeration system. Detailed warranty certificate enclosed with each cooler; sample copy available upon request.

Models covered by this specification complies with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards and conform to European Union Directives.



Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot'N Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PLF8SKTP	8.0	8.0	No	No	1/5	4.4	500	No	Yes	67 Lbs.

OASIS® BARRIER-FREE ON-A-WALL COOLER MODELS PLF8SKPE, PLF8SKTP

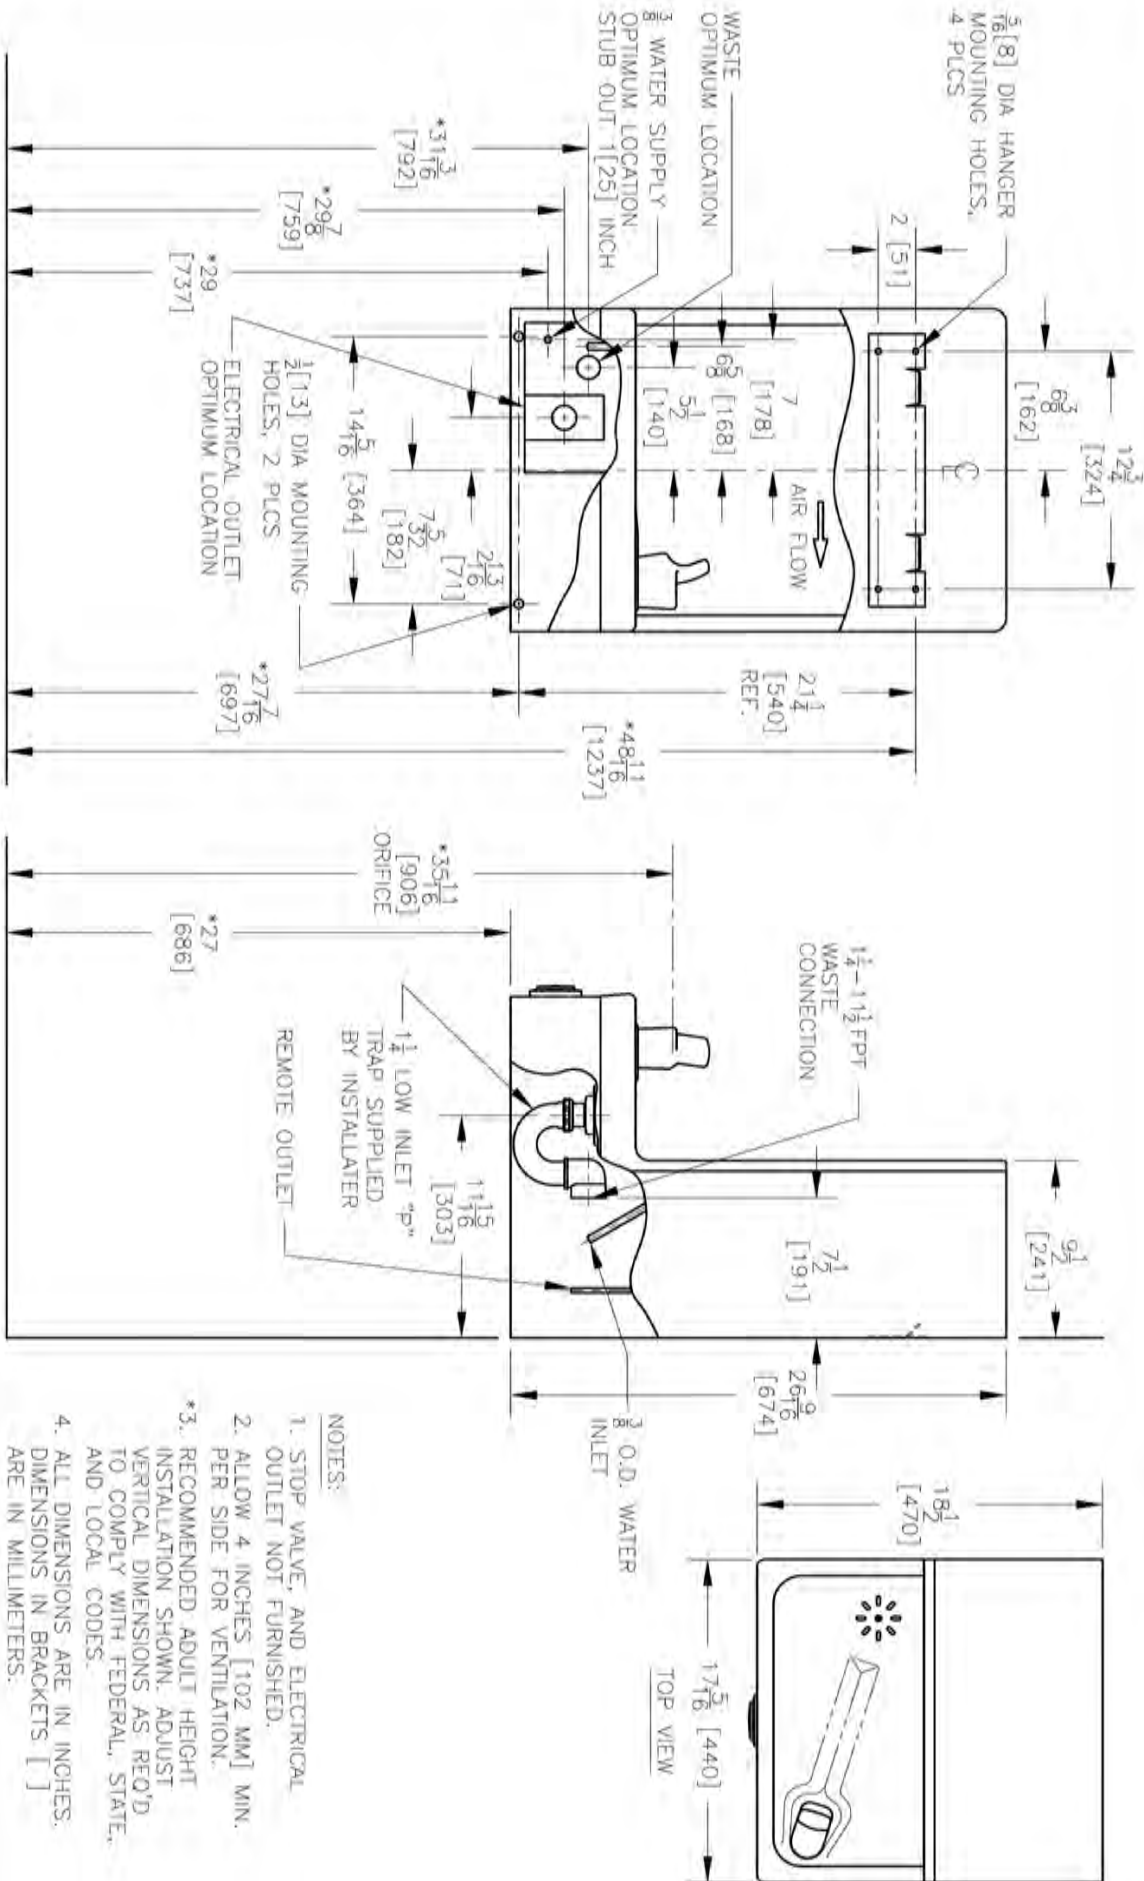

- NOTES:
1. STOP VALVE, AND ELECTRICAL OUTLET NOT FURNISHED.
 2. ALLOW 4 INCHES [102 MM] MIN. PER SIDE FOR VENTILATION.
 3. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQ'D TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.
 4. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.

