



FREE-STANDING HEAVY DUTY

PLF7P, PLF13P, PLF13PL

Models

PLF7P is ultraquiet and delivers 7 gph of chilled drinking water.

PLF13P delivers 13.3 gph of chilled drinking water.

PLF13PL is 30 5/16" high for the convenience of children, and serves 13.3 gph of chilled drinking water.

Standard Features

- > Waterways are Lead-Free in Materials & Construction
- > Dial-A-Drink® Bubbler
- > Stainless Steel Top
- > Heavy-Gauge Steel Cabinet With Separate Base
- > High-Efficiency Cooling Tank and Coil
- > Refrigerant R-134a
- > Limited year Warranty

Finishes

- > Standard Cabinet Finish: Sandstone powder coated paint on galvanized steel
- > Optional finishes (at additional cost): Stainless Steel and optional powder coated finishes.

Installation

- > Prior to roughing-in consult with local, state, and federal codes
- > Shipped with complete instructions

Limited 5-Year Warranty (Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty: One year on sealed refrigeration system and most components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.



PLF7P, PLF13P

PLF13PL

Accessories

- Glass Filler - Push Handle (029603-004)
- Glass Filler - Push Back (029603-005)
- Glass Filler - Push Down (029603-005)
- 029440-001 required for Field Installation of glass fillers
- Foot pedal operated

Product Certified to NSF/ANSI Standard 61, Annex G (weighted average lead content of <=0.25%) and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953).

Models covered by these specifications comply with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian Safety Standards.

Components in these water coolers are lead free as defined by the Safe Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.





Oasis International Product
Certified by NSF to
NSF/ANSI Standard 61, G

Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot 'N Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PLF7P	7.0	3.5	Yes	No	1/8	2.5	200	Yes	Yes	73 Lbs.
PLF13P	13.3	7.0	Yes	No	1/5	4.7	300	Yes	Yes	80 Lbs.
PLF13PL	13.3	7.0	Yes	No	1/5	4.7	300	Yes	Yes	70 Lbs.

*Industry Standard Rating Condition 80° F inlet water temperature.

Specifications subject to change without notice

OASIS™ FREE-STANDING HEAVY DUTY WATER COOLER MODELS PLF7P, PLF13P, PLF13PL

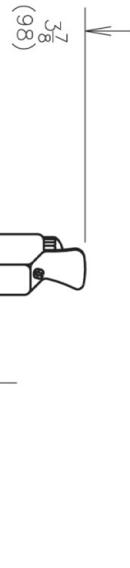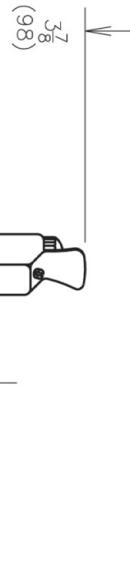

ALL DIMENSIONS ARE IN INCHES.
DIMENSIONS IN PARENTHESES ()
ARE IN MILLIMETERS.

ALLOW 4"(102) BETWEEN REAR OF WATER
COOLER AND WALL FOR VENTILATION.

(1016)

40

28 5/8
(727)

24 3/8
(619)

5 3/32(129)

3 7/8
(98)

WATER INLET
 $\frac{3}{8}$ - 18NPT

WASTE
 $1\frac{1}{4}$ - $1\frac{1}{2}$ NPT

30 5/16
(770)

19
(483)

14 3/4
(375)

3 7/8
(98)

WATER INLET
 $\frac{3}{8}$ - 18NPT

WASTE
 $1\frac{1}{4}$ - $1\frac{1}{2}$ NPT

2 3/32
(53)

19
(483)

14 3/4
(375)

REAR VIEW

15(381) SQ.

REAR VIEW

15(381) SQ.

THIRD ANGLE PROJECTION

ROUGHING-IN
AND
DIMENSIONAL
DRAWING