


SET-UP GUIDE FOR OASIS® HANDS-FREE BOTTLE FILLER ELECTRONICS

Factory default settings are for a(n):

- UNFILTERED unit
- 20 second maximum run time
- Units of gallons, when program is set as FILTERED unit

You can change program settings by entering program mode. Program mode is accessed by either pressing toggle button extending up from top of circuit board or by pressing remote toggle button.

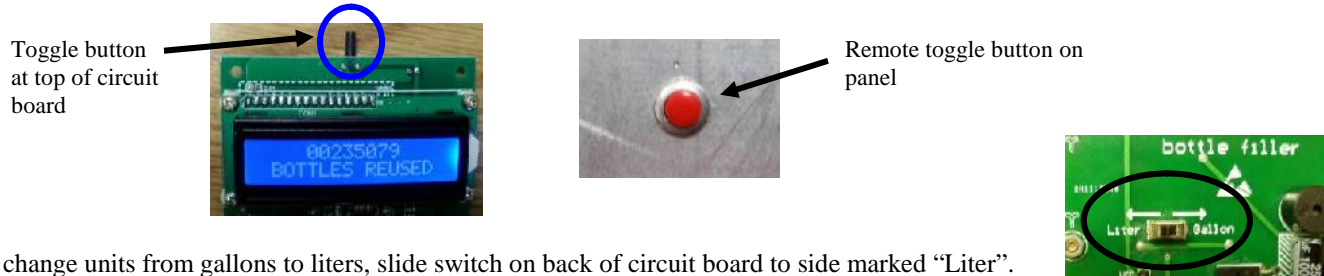

To change units from gallons to liters, slide switch on back of circuit board to side marked “Liter”.

For Hands-free Versafiller models, top cap will need to be set aside until programming is complete. Remove top cap by unscrewing two (2) T15 torx screws if needed.

Reach hand down between frame and front of cabinet to gently press button sticking up from top of circuit board (Note: Circuit board runs on low voltage and will not shock you). A remote button is available. Remove wire tie bundling it inside bottle filler and feed it through hole in cooler top. You can then adjust program using button through access panel of cooler.

For Hands-free Aquapointe models, remove lower front panel (if applicable) or lift out lower edge of upper panel to reach remote toggle button.

To change the program settings, use the following steps:

1. Press and hold toggle button for about 3 seconds to enter program mode. When you hear a beep, let go of button. You are now in program mode. Pressing button for an instant will advance to next screen. It will revert back to operating mode if no button is pressed for 10 seconds.
2. When you enter program mode, display screen will read “UNFILTERED UNIT.” To access settings for “FILTERED UNIT”, press and hold button for about 3 seconds. Press button for an instant to advance to next menu item.
3. If you wish to reset filter life counter or bottle counter, press and hold button for 3 seconds in screen asking corresponding question.
4. Default capacity for filter life counter is 1250 gallons [4731 liters] for a Versafiller. Press and hold button 3 seconds in “FILTER CAPACITY OF...” screen to change setting to 3000 gallons [11355 liters] for galaxi® green filter media.
5. “Bottle Filler Set_time” screen is to adjust maximum run time once sensor is activated. Water flow will stop once container is removed from alcove, but this feature ensures very little water is wasted if someone tampers with dispenser.
6. Put top cap or access panel back on and fasten in place.

Unit sensor is calibrated at factory and can be re-calibrated by unplugging from electrical power, wait 10 seconds and plug back into electrical power. Also, if you are having problems with sensing of a bottle, try re-calibrating it before calling for service.



OASIS INTERNATIONAL

222 East Campus View Blvd. • Columbus, OH 43235 U.S.A.

1-800-950-3226

www.oasiscoolers.com