



CONTACTLESS BOTTLE FILLER

Your Safest Countertop Solution





Replace your existing countertop with a **hands-free** activation, designed to your needs.



Suggested for **Office/Canteen:**

Over the counter:

PWSMEBFY
PWSMEBQY - With QUASAR

Under the counter:

RLF12Y remote chiller + 2 filters + flowmeter

Options:

Tailor the unit to your needs and choose the features you require:

- Chiller:
 - » R1PY
 - » RLF8Y
 - » RLF12Y
 - » R12LCY
 - » R20LCY
- Range of green filters
- QUASAR (UVC LED)
- ULTRA BLUv (UV)
- Flow meter
- Installation kit



QUASAR



ULTRA BLU_v



Protect your loved ones with a **touchless** bottle filler that brings you **safe water**.

Suggested for **HORECA** environment:

Over the counter:

PWSMEBFY

PWSMEBQY - With QUASAR

Under the counter:

RLF8Y remote chiller + remedi filters + flowmeter

QUASAR + **remedi**

Combine leaders in disinfection and filtration to have the safest and highest quality water on your premises.

Filter chemicals and pathogens with **green filter remedi** and use **QUASAR** at point of dispense to eliminate any potential pathogen/virus cross-contamination.

Keep your staff and customers safe with OASIS.



Save plastic with OASIS
eco-friendly green filters
+ **save space** on your counter
with our slim dispenser
compared to traditional bulky
countertops dispensers.

(PWSMEBQ is 14.4 cm deep)

Suggested for the **home**:

Over the counter:

PWSMEBFY

PWSMEBQY - With QUASAR

Under the counter:


R1PY remote chiller + remedi filter + flowmeter



Have peace of mind when your family refill their sports bottles knowing they have the cleanest water for their health.

OASIS's eco-friendly **green filters** have interchangeable filter media. Unlike traditional filters you never have to throw the housing in the trash.

Refill your sports bottle whenever you need. No need to worry about waste again. Enjoy watching the bottle counter figure rise each time you fill your bottle.

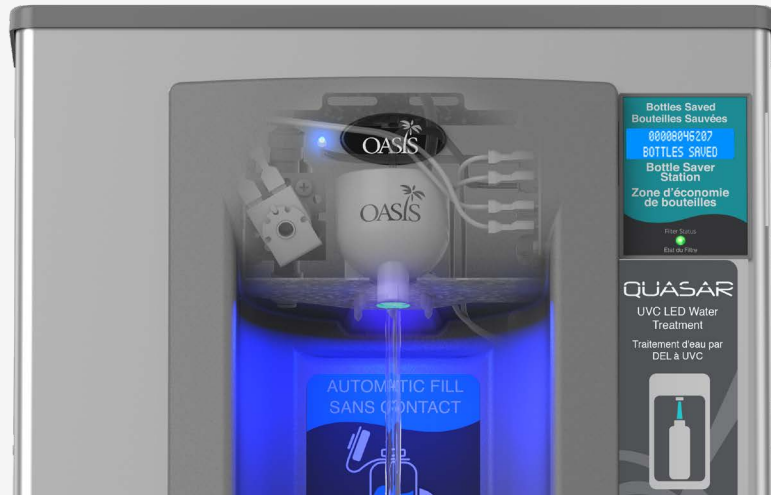

DISINFECTION

QUASAR  ULTRA BLUv 

QUASAR UVC LED

- UVC LED at point of dispense.
- Killing 99.99% of pathogens instantly as water flows.
- UVC LEDs pulse on every 10 minutes for a short duration to keep the dispense point sanitized.

ULTRA BLUv UV

- In-line UV Disinfecting water from within unit.
- Can be retrofitted.

FILTRATION


remedi

Remedi filter for virus removal

- Pleated filter media infused with Powdered Activated Carbon further enhanced with nano-technology.
- Remedi filters up to 0.02 microns.
- Filters potential pharmaceutical waste and pathogens that may be in water supply.



OASIS green filter has a range of filters to choose from: One for every requirement.

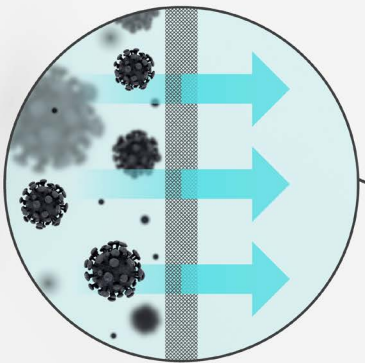

CONTACTLESS

- An electronic-eye automatically activates water flow. No need to touch surfaces.
- Additionally, our large alcove means that water bottles will not touch dispense point (265mm).
- Eliminating possibilities of potential cross-contamination



TECH SPEC

Bottle Filler.

Model	PWSMEBFY	PWSMEBQY
Type	Contactless (Hands Free) Surface Mount / Countertop Bottle Filler	Contactless (Hands Free) Surface Mount / Countertop Bottle Filler with QUASAR
10° C Drinking Water/ 21° C Ambient Air Temp:		
Rated Capacity LPH	Non-Refrigerated	Non-Refrigerated
Base Rate LPH		
Pre-Cooler		
Hot 'N Cold™ Model	No	No
220-240 Volts 50/60 HZ:		
Compr. HP		
Full Load Amps	0.1	0.1
Rated Watts	7	7
Auto-Off Water Flow	Yes	Yes
Glass Filler ACC Option	No	No
Net Weight. Approx (kg)	3	3
Dimensions (mm)	630(H) x 413(W) x 144(D)	630(H) x 413(W) x 144(D)
Dispense Height (mm)	265	265

OASIS IRELAND

Bunree Industrial Estate,
Ballina, Co. Mayo, Ireland,
+353 96 71222

OASIS POLAND

ul.Gutenberga 20,
44-164, Gliwice, Poland
+48 32 332 65 01

www.oasis.ie
www.oasisbottlefillers.com

info@oasis.ie

Chillers.

Model	R1PY	RLF8Y	RLF12Y	R12LCY	R20LCY
Type	For under sink or remote installations	Remote or In-A-Wall	Remote or In-A-Wall	Remote or In-A-Wall	Remote or In-A-Wall
10° C Drinking Water/ 21° C Ambient Air Temp:					
Rated Capacity LPH	6	60	90	90	150
Base Rate LPH	6	60	90	90	150
220-240 Volts, 50/60HZ:					
Compr. HP	1/20	1/4	1/3	1/2	1
Full Load Amps	0.6	2.2	3.7	5	6.5
Rated Watts	135	340	620	660	860
Net Wt. Approx (kg)	14	24	24	24	35
Dimensions (mm)	30.2(H) x 26.2(W) x 22.1(D)	40.6(H) x 41.7(W) x 26.2(D)	40.6(H) x 41.7(W) x 26.2(D)	45.7(H) x 27.8(W) x 41.7(D)	45.7(H) x 27.8(W) x 59.4(D)



R1PY



RLF8Y
RLF12Y
R12LCY



R20LCY