



M12EBFY ■ Contactless + Manual, Refrigerated
M8EBFY ■ Contactless + Manual, Refrigerated
 Hydration Station Combo

M12EBFY

Delivering 90LPH of 10°C water at 21°C ambient.
 The cooling system uses R-134a or R-290a refrigerant.

M8EBFY

Delivering 60LPH of 10°C water at 21°C ambient.
 Cooling system uses R-134a refrigerant.





These surface mount hydration station combos have two activation methods. The bottle filler includes an electronic sensor for a contactless (touch free) activation and a 30 second shut off timer. The radii drinking fountain is activated via the push-button.

The Bottle Counter conveniently displays the number of times the unit has been used, encouraging the refill of sports bottles.

Key moulded components shall contain Freshield, which utilises a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discolouration, odours and degradation.

Suitable for public building, gymnasiums, sports complexes, hospitals, schools, and offices.

MODEL CODE	M12EBFY	M8EBFY
ACTIVATION	Bottle Filler: Contactless (Infrared sensor) Drinking Fountain: Manual (Push-button)	
SENSOR COVERAGE	Up to 5cm (approx.)	
FILTRATION	Green Filter (optional), Built-in 100 micron strainer	
AUTO-OFF WATER FLOW	Bottle Filler: Yes ; Drinking Fountain: No	
DRAINAGE TYPE	Built in drain, Removable drip tray	
EXTERIOR CHASSIS	Antimicrobial ABS Plastic, Brushed Stainless Steel	
DIMENSIONS	Heavy Duty Galvanised Steel	
ALCOVE HEIGHT	1035(H) x 1003(W) x 483(D) (287 recessed)	
NET WEIGHT	265 mm	
POWER SUPPLY	73 kg	
COOLING PERFORMANCE	90 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.)	60 LPH Rated Capacity & 60 LPH Base Rate (10°C in 21°C amb. temp.)
FULL LOAD AMPS	3.7A	2.2A
RATED WATTS	627 W	347 W
ENERGY SYSTEM	Refrigeration is on only when in use or if water temp increases during long period of standby.	
COUNTRY OF ORIGIN	Mexico	
CERTIFICATIONS	ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS), WRAS	
WARRANTY	1 Year	

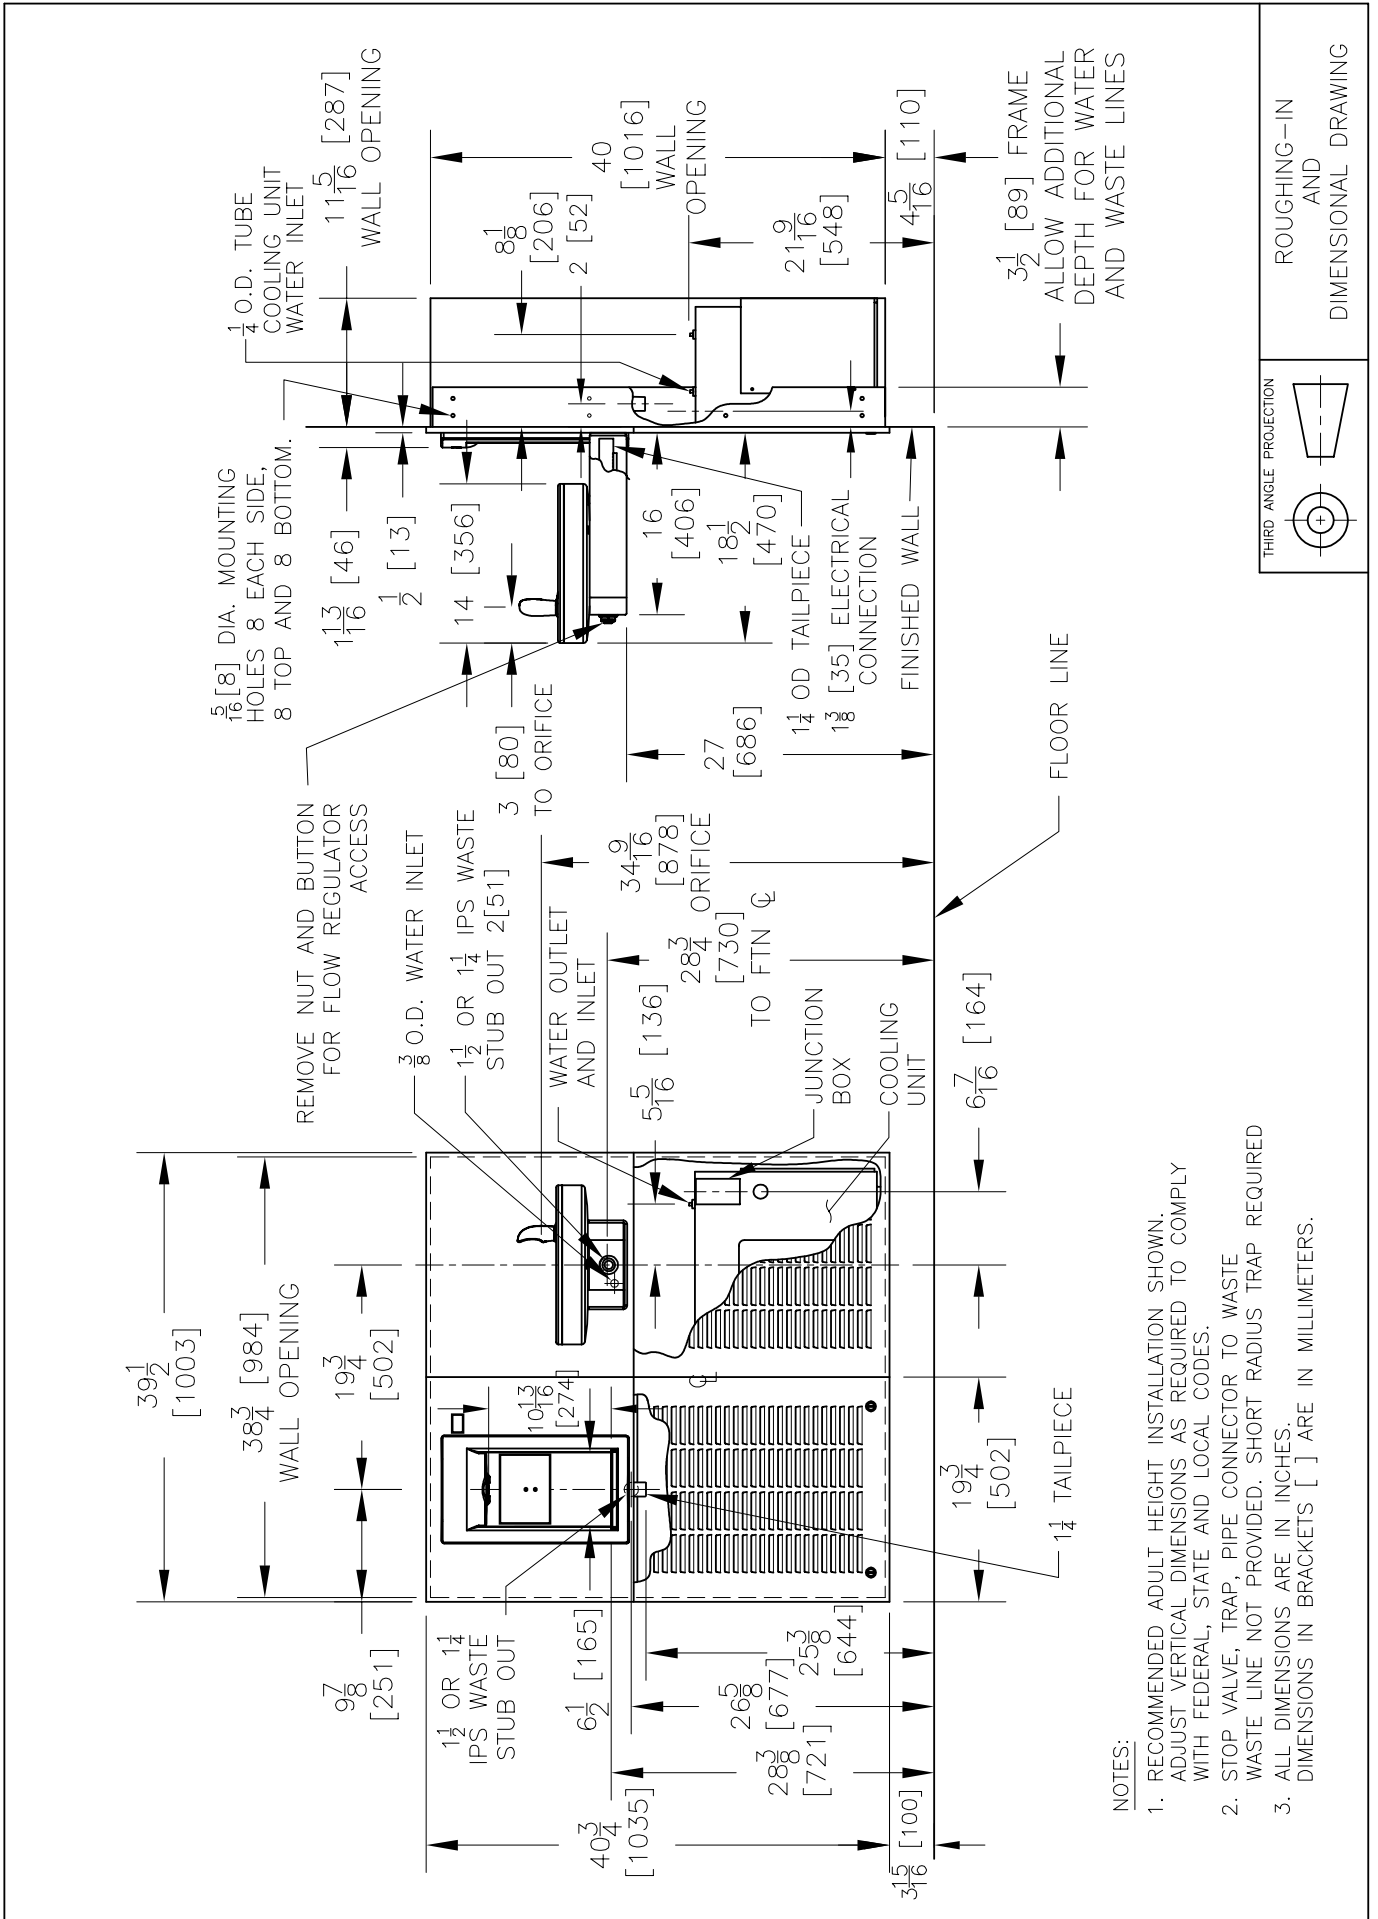

ROUGHING-IN AND DIMENSIONAL DRAWING

- NOTES:
1. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQUIRED TO COMPLY WITH FEDERAL, STATE AND LOCAL CODES.
 2. STOP VALVE, TRAP, PIPE CONNECTOR TO WASTE WASTE LINE NOT PROVIDED. SHORT RADIUS TRAP REQUIRED
 3. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.



www.oasis.ie
www.oasiscoolers.com
info@oasis.ie

OASIS IRELAND
Bunree Industrial Estate, Ballina
Co. Mayo F26 D5R3 Ireland
+353 96 71222

OASIS POLAND
ul. Gutenberga 20
44-164, Gliwice, Poland
+48 32 332 65 01