



M8SBPMY.
Manual, Refrigerated
Drinking Fountain

**For refreshing cold water, choose M8SBPMY;
a modular drinking fountain.**

M8SBPMY delivers 60LPH of 10°C water at 21°C ambient. This modular drinking fountain is manually activated via touch-button.

Complies with ANSI A117.1 and ADA. Shall comply with all relevant CE directives (LVD , EMC, RoHS). Shall comply with ANSI/NSF 61.

Suitable for public building, gymnasiums, sports complexes, hospitals, schools, and offices.


The cooling system uses R-134a or R-290a refrigerant.






MODEL CODE	M8SBPMY
ACTIVATION	Mechanical (Vandal-Resistant touch-button)
FILTRATION	Green Filter (optional), Built-in 100 micron strainer
DISINFECTION	Ultra Blu V - UV (optional)
AUTO-OFF WATER FLOW	No
DRAINAGE TYPE	Built in drain, Removable drip tray
EXTERIOR CHASSIS	Brushed Stainless Steel Heavy Duty Galvanised Steel
DIMENSIONS	1035(H) x 502(W) x 287(D) mm (483 recessed)
NET WEIGHT	44 kg
POWER SUPPLY	220-240V, 50/60 Hz
COOLING PERFORMANCE	60 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.)
FULL LOAD AMPS	2.2A
RATED WATTS	340 W
ENERGY SYSTEM	Refrigeration is on only when in use or if water temp increases during long period of standby.
COUNTRY OF ORIGIN	Mexico
CERTIFICATIONS	ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS)
WARRANTY	1 Year

ROUGHING-IN AND DIMENSIONAL DRAWING

WALL OPENING & ASSEMBLY

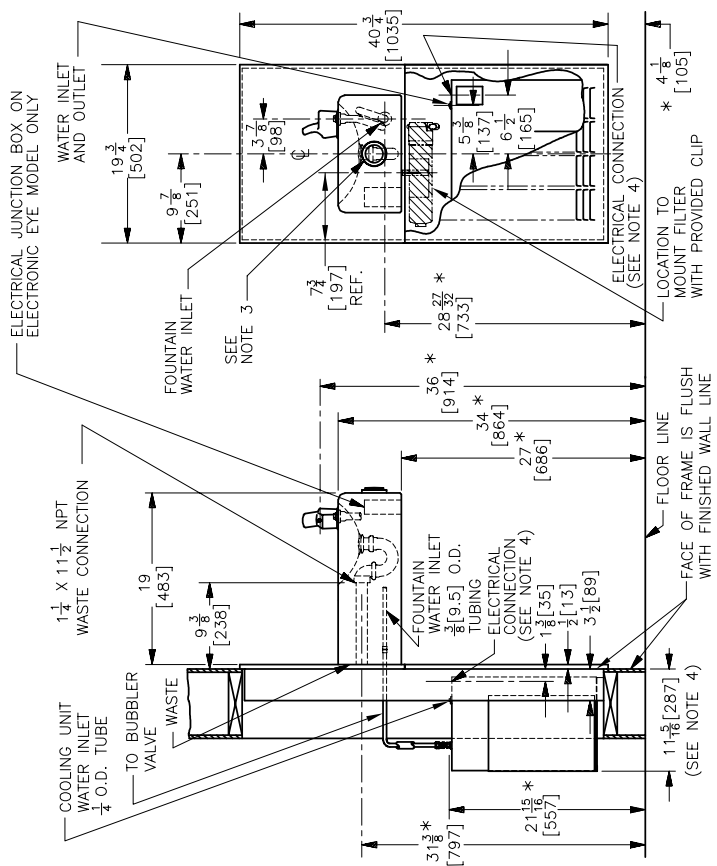

- NOTES:
- *1. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQUIRED TO COMPLY WITH FEDERAL, STATE AND LOCAL CODES.
 - 2. STOP VALVE NOT PROVIDED WITH UNIT.
 - 3. 2" [51] DIA. PUSHBUTTON OR TWO 1 1/8" [14] DIA. ELECTRONIC EYES. PUSHBUTTON SHOWN.
 - 4. M(F)8SBPM AND M(F)8SBEE ONLY.
 - 5. PLAIN (NO LOUVERS) - MSBPM ONLY.
 - 6. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.

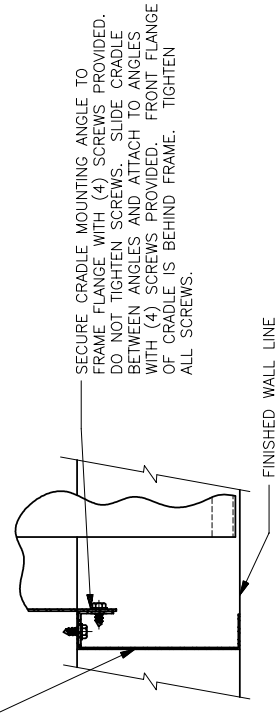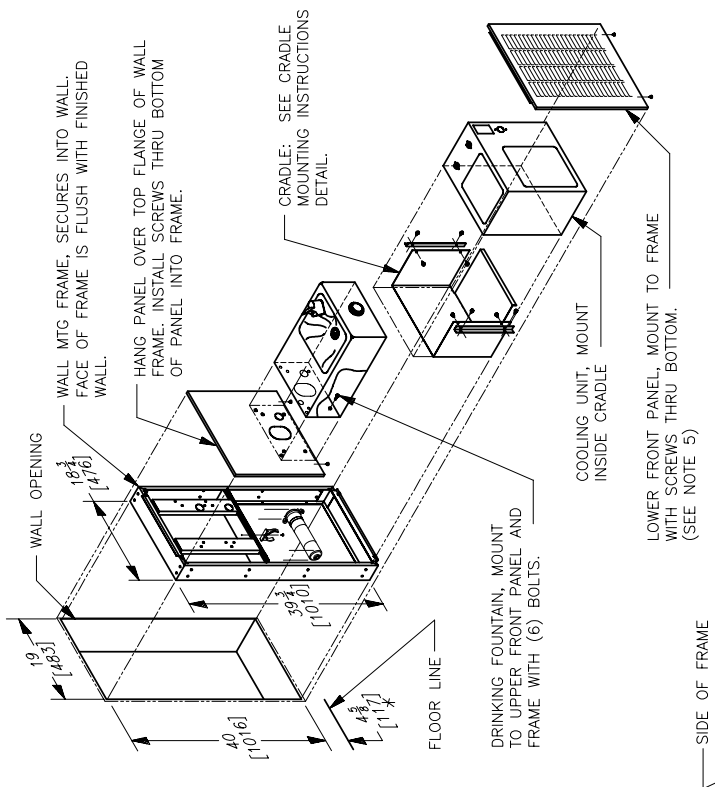

ROUGHING-IN AND DIMENSIONAL DRAWING