



PLF8FPMCDY ■ Manual, Refrigerated
PLF12FPMCDY ■ Manual, Refrigerated
 Drinking Fountain

PLF8FPMCDY

Delivering 60LPH of 10°C water at 21°C ambient.
 The cooling system uses R-134a or R-290a refrigerant.

PLF12FPMCDY

Delivering 90LPH of 10°C water at 21°C ambient.
 The cooling system uses R-134a or R-290a refrigerant.

These surface mount drinking fountains are manually activated via the vandal-resistant touch-button.


These drinking fountains are fully recessed and have an integrated cup dispenser, proving to be a great space-saver.

Complies with ANSI A117.1 and ADA. Shall comply with all relevant CE directives (LVD , EMC, RoHS). Shall comply with ANSI/NSF 61.

Suitable for public building, gymnasiums, sports complexes, hospitals, schools, and offices.



MODEL CODE	PLF8FPMCDY	PLF12FPMCDY
ACTIVATION	Mechanical (Constant Flow Bubbler)	
FILTRATION	Green Filter (optional), Built-in 100 micron strainer	
DISINFECTION	Ultra Blu V (optional)	
AUTO-OFF WATER FLOW	No	
DRAINAGE TYPE	Built in drain, Removable drip tray	
EXTERIOR CHASSIS	Brushed Stainless Steel Heavy Duty Galvanised Steel	
DIMENSIONS	1410(H) x 610(W) x 13(D) mm (274 recessed)	
NET WEIGHT	44 kg	76 kg
POWER SUPPLY	220-240V, 50/60 Hz	
COOLING PERFORMANCE	60 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.)	90 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.)
FULL LOAD AMPS	2.2A	3.7A
RATED WATTS	340 W	620 W
ENERGY SYSTEM	Refrigeration is on only when in use or if water temp increases during long period of standby.	
COUNTRY OF ORIGIN	Mexico	
CERTIFICATIONS	ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS)	
WARRANTY	1 Year	

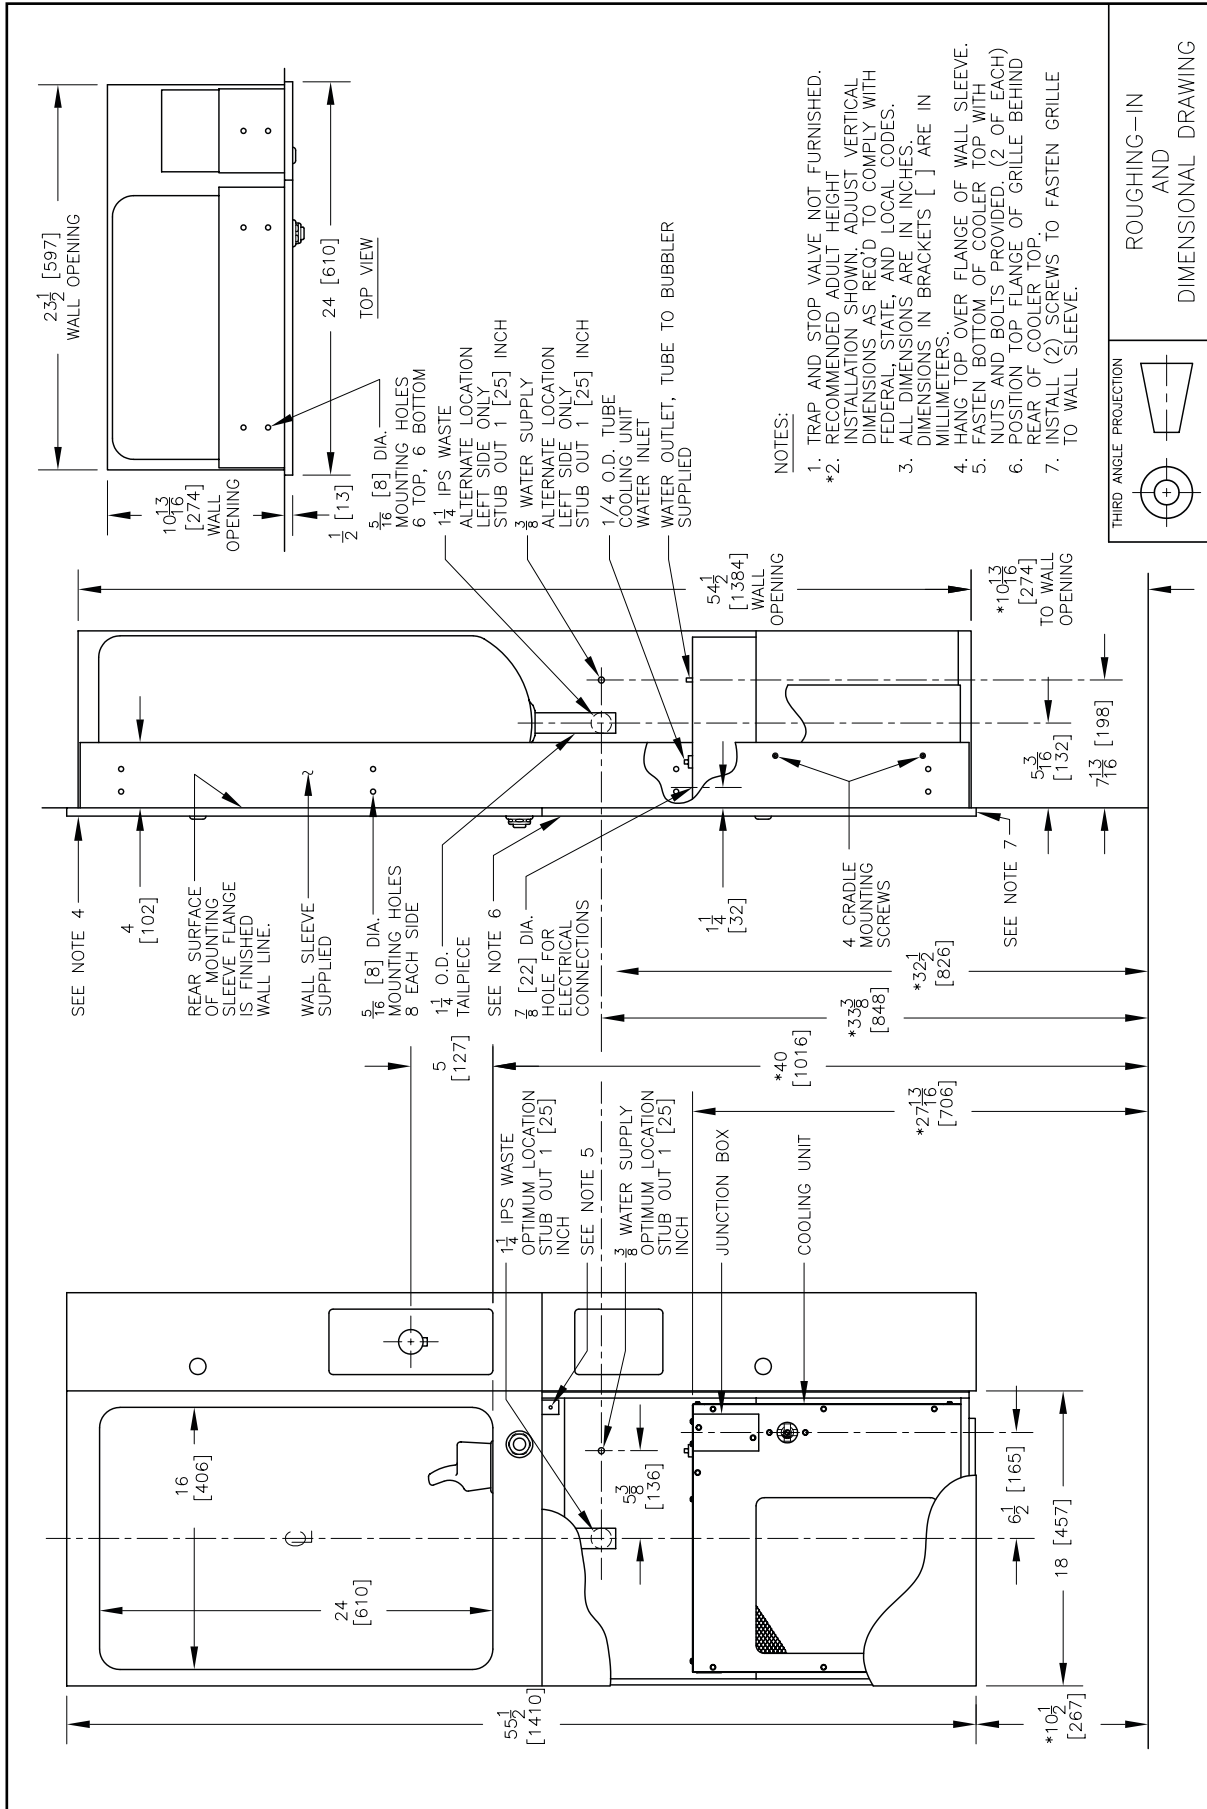

- NOTES:
1. TRAP AND STOP VALVE NOT FURNISHED.
 - *2. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQ'D TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.
 3. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.
 4. HANG TOP OVER FLANGE OF WALL SLEEVE. FASTEN BOTTOM OF COOLER TOP WITH NUTS AND BOLTS PROVIDED (2 OF EACH) POSITION TOP FLANGE OF GRILLE BEHIND REAR OF COOLER TOP.
 7. INSTALL (2) SCREWS TO FASTEN GRILLE TO WALL SLEEVE.

THIRD ANGLE PROJECTION

ROUGHING-IN AND DIMENSIONAL DRAWING



www.oasis.ie
www.oasiscoolers.com
info@oasis.ie

OASIS IRELAND
Bunree Industrial Estate, Ballina
Co. Mayo F26 D5R3 Ireland
+353 96 71222

OASIS POLAND
ul. Gutenberga 20
44-164, Gliwice, Poland
+48 32 332 65 01