



## QUASAR PWEBQY RETROFIT KIT.

Contactless, Non-Refrigerated  
Bottle Filler

**Quasar PWEBQY is a contactless bottle filler, retrofittable to your drinking fountain!**  
**Quasar technology kills bacteria directly at the spout, ensuring enjoyable, safe drinking water!**

Quasar PWEBQY Retrofit Kit delivers ambient drinking water. This bottle filler includes an electronic sensor for a contactless (touch free) activation and a 30 second shut off timer. The Bottle Counter conveniently displays the number of times the unit has been used, encouraging the refill of sports bottles.

Quasar bottle fillers shall have UVC-LED treatment at the point of dispense, which disinfects the water while it is being dispensed; Killing 99.99% of bacteria. UVC-LED also cycles on periodically to keep the dispense-point sanitized between dispenses.

Key Quasar bottle filler moulded components shall contain Freshield, which utilises a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discolouration, odours and degradation.

Complies with ANSI A117.1 and ADA. Shall comply with all relevant CE directives (LVD , EMC, RoHS). Shall comply with ANSI/NSF 61.

Suitable for public building, gymnasiums, sports complexes, hospitals, schools, and offices.





MODEL CODE	PWEBQY
ACTIVATION	Contactless (Infrared sensor)
SENSOR COVERAGE	Up to 5cm (approx.)
FILTRATION	Green Filter (optional), Built-in 100 micron strainer
DISINFECTION	Quasar UVC-LED
AUTO-OFF WATER FLOW	Yes
DRAINAGE TYPE	Built in drain, Removable drip tray
EXTERIOR	Antimicrobial ABS Plastic, Brushed Stainless Steel
CHASSIS	Heavy Duty Galvanised Steel
DIMENSIONS	480(H) x 413(W) x 144(D) mm
ALCOVE HEIGHT	250 mm
NET WEIGHT	5 kg
POWER SUPPLY	220-240V, 50/60 Hz
COOLING PERFORMANCE	Non-Refrigerated
FULL LOAD AMPS	0.1A
RATED WATTS	7 W
COUNTRY OF ORIGIN	Mexico
CERTIFICATIONS	ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS) , WRAS
WARRANTY	1 Year

**NOTES:**

- \*1. RECOMMENDED ADULT BARRIER FREE HEIGHT INSTALLATION SHOWN. REDUCE HEIGHT BY 3 INCHES FOR INSTALLATIONS USED PRIMARILY BY CHILDREN AGES 12 AND YOUNGER. UNIT SHALL ALSO HAVE A MINIMUM CLEAR FLOOR SPACE 30[760] BY 48[1220]. ADJUST VERTICAL DIMENSIONS AS REQ'D TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.
- 2. 115v GROUNDING NORTH AMERICAN DUPLEX RECEPTACLE REQUIRED. THIS DRINKING WATER COOLER IS INTENDED TO BE CONNECTED TO A 20A MINIMUM GROUND FAULT CIRCUIT INTERRUPTING (GFCI) DEVICE TO MEET UL REQUIREMENTS.
- 3. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.

Rough-in drawing is shown with a PG8AC unit in order to show the proper height of the unit when retrofitted to the parent unit and height from the floor in order to comply with ADA standards. THE PG8AC UNIT IS NOT INCLUDED WITH THE PURCHASE OF THE PWEBF.

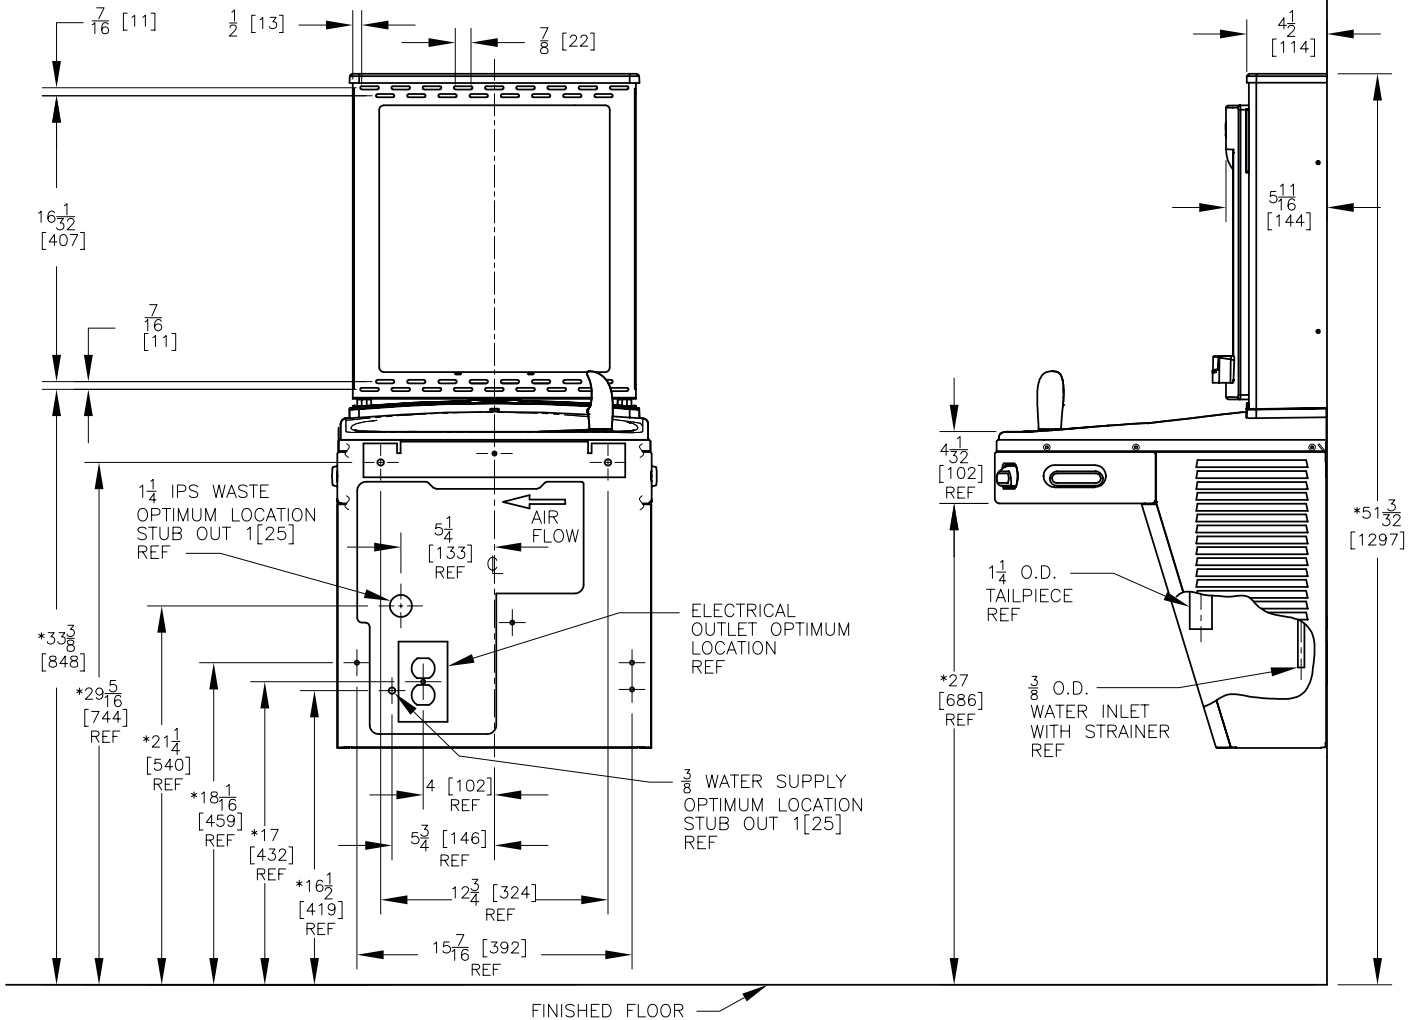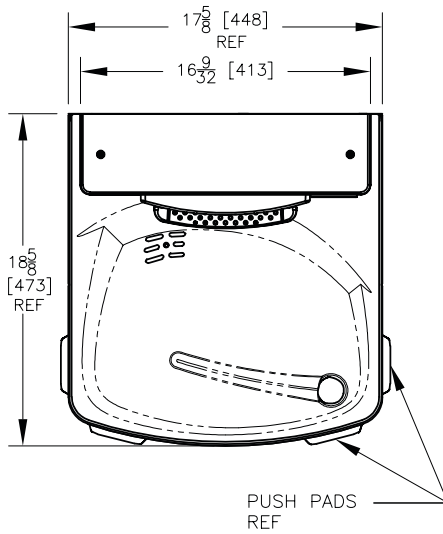

www.oasis.ie  
www.oasisbottlefillers.com  
info@oasis.ie

**OASIS IRELAND**  
Bunree Industrial Estate, Ballina,  
Co. Mayo, F26 D5R3, Ireland.  
+353 96 71222

**OASIS POLAND**  
ul. Gutenberga 20,  
44-164, Gliwice, Poland  
+48 32 332 65 01

