



VERSAFILLER P8EBFTY ■ Contactless, Refrigerated
VERSAFILLER PEBFTY ■ Contactless, Non-Refrigerated
 Hydration Station Combo

Versafiller P8EBFTY

Delivering 60LPH of 10°C water at 21°C ambient.
 Cooling system uses R-134a refrigerant.

Versafiller PEBFTY

Delivering ambient drinking water.

This surface mount hydration station combo features a completely contactless activation method. The bottle filler includes an electronic sensor for a contactless (touch free) activation and a 30 second shut off timer. The drinking fountain is activated via infrared sensor below the nose.

The Bottle Counter conveniently displays the number of times the unit has been used, encouraging the refill of sports bottles.

Key Versafiller moulded components shall contain Freshield, which utilises a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discolouration, odours and degradation.


Suitable for public building, gymnasiums, sports complexes, hospitals, schools, and offices.



| MODEL CODE | P8EBFTY | PEBFTY |
|---------------------|--|--------|
| ACTIVATION | Bottle Filler: Contactless (Infrared sensor) Drinking Fountain: Contactless (Infrared sensor) | |
| SENSOR COVERAGE | Up to 5cm (approx.) | |
| FILTRATION | Green Filter (optional), Built-in 100 micron strainer | |
| DISINFECTION | Quasar UVC-LED (optional) | |
| AUTO-OFF WATER FLOW | Bottle Filler: Yes ; Drinking Fountain: No | |
| DRAINAGE TYPE | Built in drain, Removable drip tray | |
| EXTERIOR CHASSIS | Antimicrobial ABS Plastic, Brushed Stainless Steel | |
| DIMENSIONS | Heavy Duty Galvanised Steel | |
| ALCOVE HEIGHT | 960(H) x 413(W) x 473(D) | |
| NET WEIGHT | 31 kg | 16 kg |
| POWER SUPPLY | 220-240V, 50/60 Hz | |
| COOLING PERFORMANCE | 60 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.) | - |
| FULL LOAD AMPS | 2.2A | 0.1A |
| RATED WATTS | 457 W | 7 W |
| ENERGY SYSTEM | Refrigeration is on only when in use or if water temp increases during long period of standby. | - |
| COUNTRY OF ORIGIN | Mexico | |
| CERTIFICATIONS | ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS), WRAS | |
| WARRANTY | 1 Year | |

NOTES:

1. TRAP, STOP VALVE AND ELECTRICAL OUTLET NOT FURNISHED.
2. ALLOW 4 INCHES [102 MM] MIN. PER SIDE FOR VENTILATION.
- *3. RECOMMENDED ADULT BARRIER FREE HEIGHT INSTALLATION SHOWN. REDUCE HEIGHT BY 3 INCHES FOR INSTALLATIONS USED PRIMARILY BY CHILDREN AGES 12 AND YOUNGER. UNIT SHALL ALSO HAVE A MINIMUM CLEAR FLOOR SPACE 30[760] BY 48[1220]. ADJUST VERTICAL DIMENSIONS AS REQ'D TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.
4. 115v GROUNDED NORTH AMERICAN DUPLEX RECEPTACLE REQUIRED. THIS DRINKING WATER COOLER IS INTENDED TO BE CONNECTED TO A 20A MINIMUM GROUND FAULT CIRCUIT INTERRUPTING (GFCI) DEVICE TO MEET UL REQUIREMENTS.
5. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.

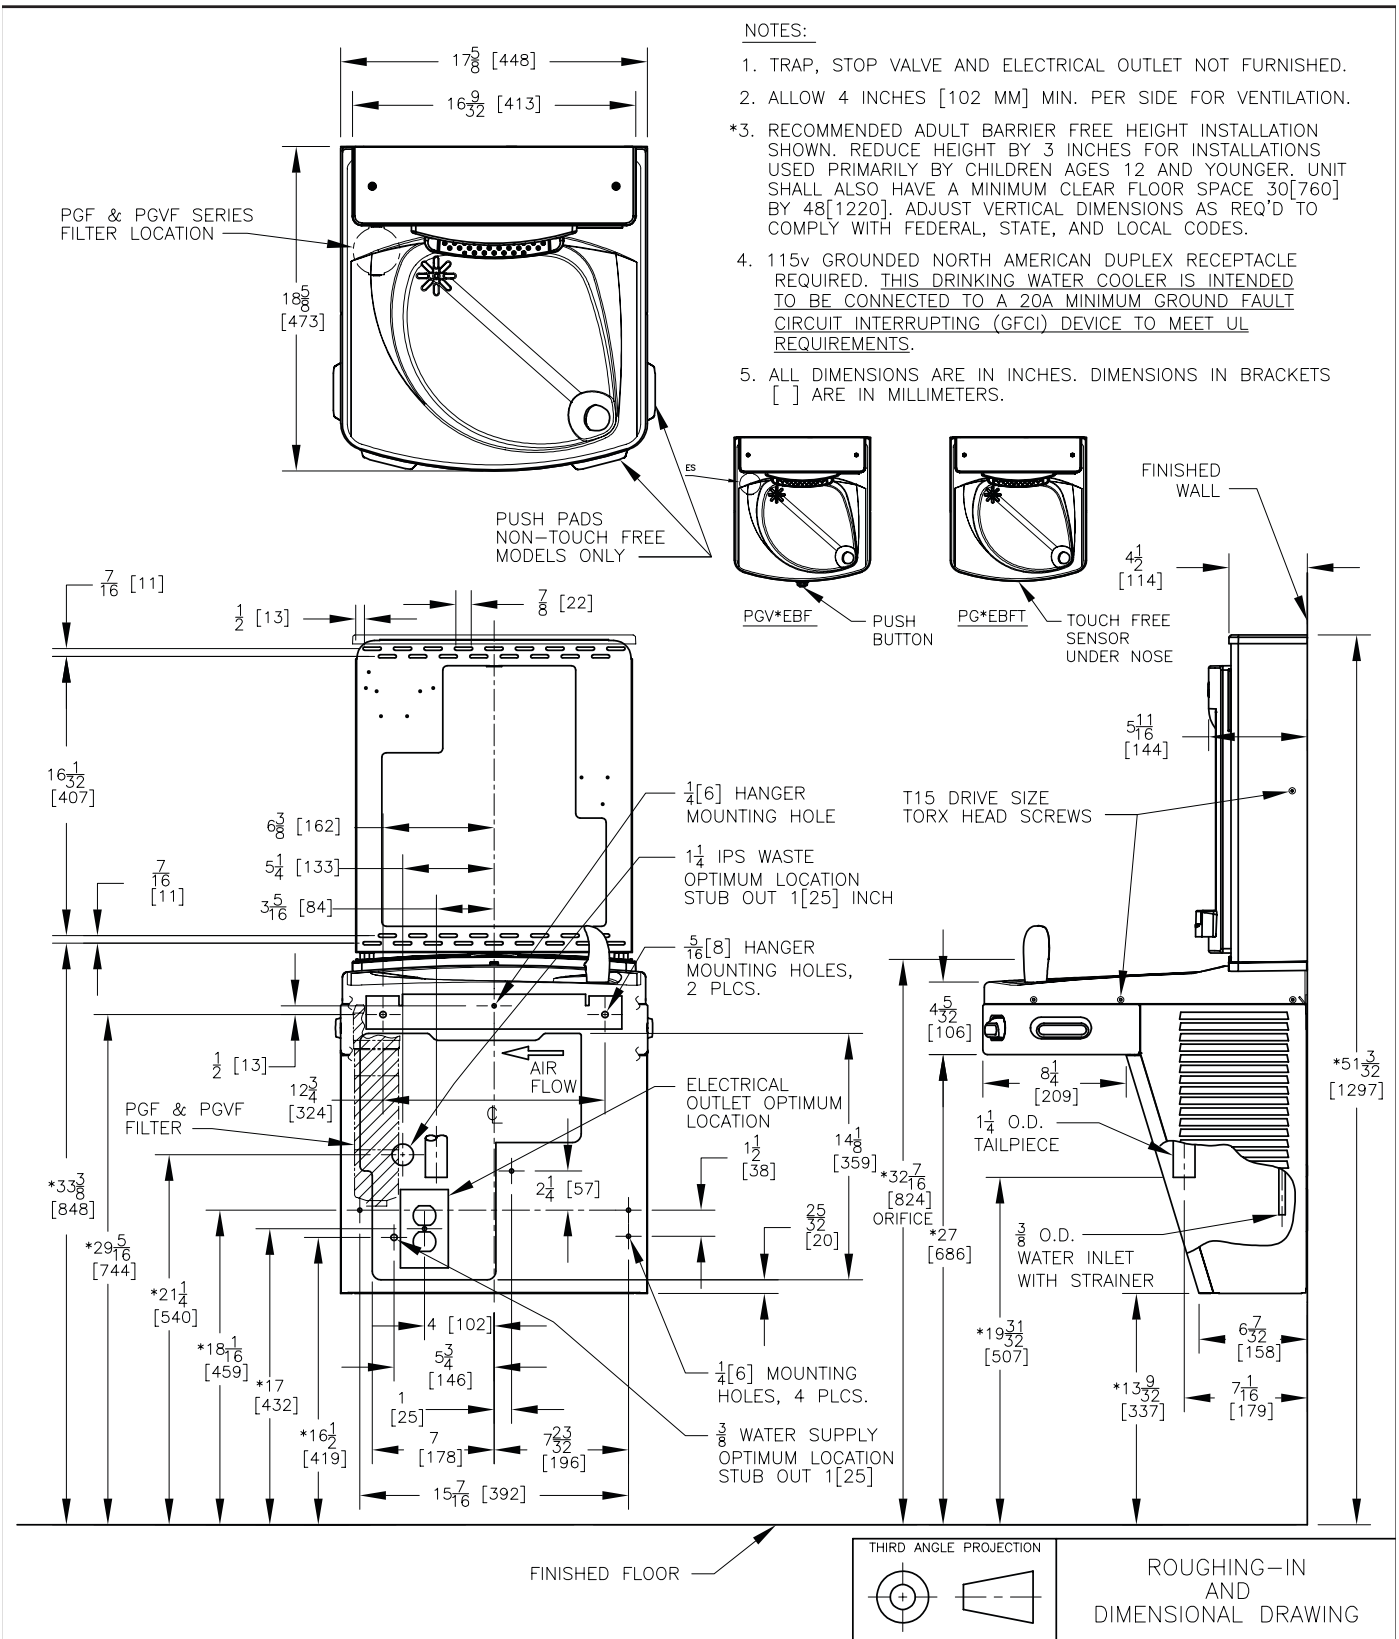

www.oasis.ie
www.oasisbottlefillers.com
info@oasis.ie

OASIS IRELAND
Bunree Industrial Estate, Ballina,
Co. Mayo, F26 D5R3, Ireland.
+353 96 71222

OASIS POLAND
ul. Guttenberga 20,
44-164, Gliwice, Poland
+48 32 332 65 01

