



VERSAFILLER PV8SBFY

Manual, Refrigerated, Vandal-Resistant

VERSAFILLER PVSBF

Manual, Non-Refrigerated, Vandal-Resistant

Hydration Station Combo

Versafiller PV8SBFY

Delivering 60LPH of 10°C water at 21°C ambient.
Cooling system uses R-134a refrigerant.

Versafiller PVSBF

Delivering ambient drinking water.


These surface mount hydration station combos are manually activated. The bottle filler requires a push of the touch-button, while the drinking fountain is activated via the vandal-resistant touch-button

Key Versafiller moulded components shall contain Freshield, which utilises a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discolouration, odours and degradation.

Suitable for public building, gymnasiums, sports complexes, hospitals, schools, and offices.



MODEL CODE	PV8SBFY	PVSBF
ACTIVATION	Bottle Filler: Manual (Touch-button) Drinking Fountain: Manual (Vandal-Resistant Touch-button)	
FILTRATION	Green Filter (optional), Built-in 100 micron strainer	
AUTO-OFF WATER FLOW	No	
DRAINAGE TYPE	Built in drain, Removable drip tray	
EXTERIOR CHASSIS	Antimicrobial ABS Plastic, Brushed Stainless Steel	
DIMENSIONS	Heavy Duty Galvanised Steel	
ALCOVE HEIGHT	960(H) x 413(W) x 473(D)	
NET WEIGHT	31 kg	16 kg
POWER SUPPLY	220-240V, 50/60 Hz	-
COOLING PERFORMANCE	60 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.)	Non-Refrigerated
FULL LOAD AMPS	2.2A	-
RATED WATTS	450 W	-
ENERGY SYSTEM	Refrigeration is on only when in use or if water temp increases during long period of standby.	-
COUNTRY OF ORIGIN	Mexico	
CERTIFICATIONS	ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS) , WRAS	
WARRANTY	1 Year	

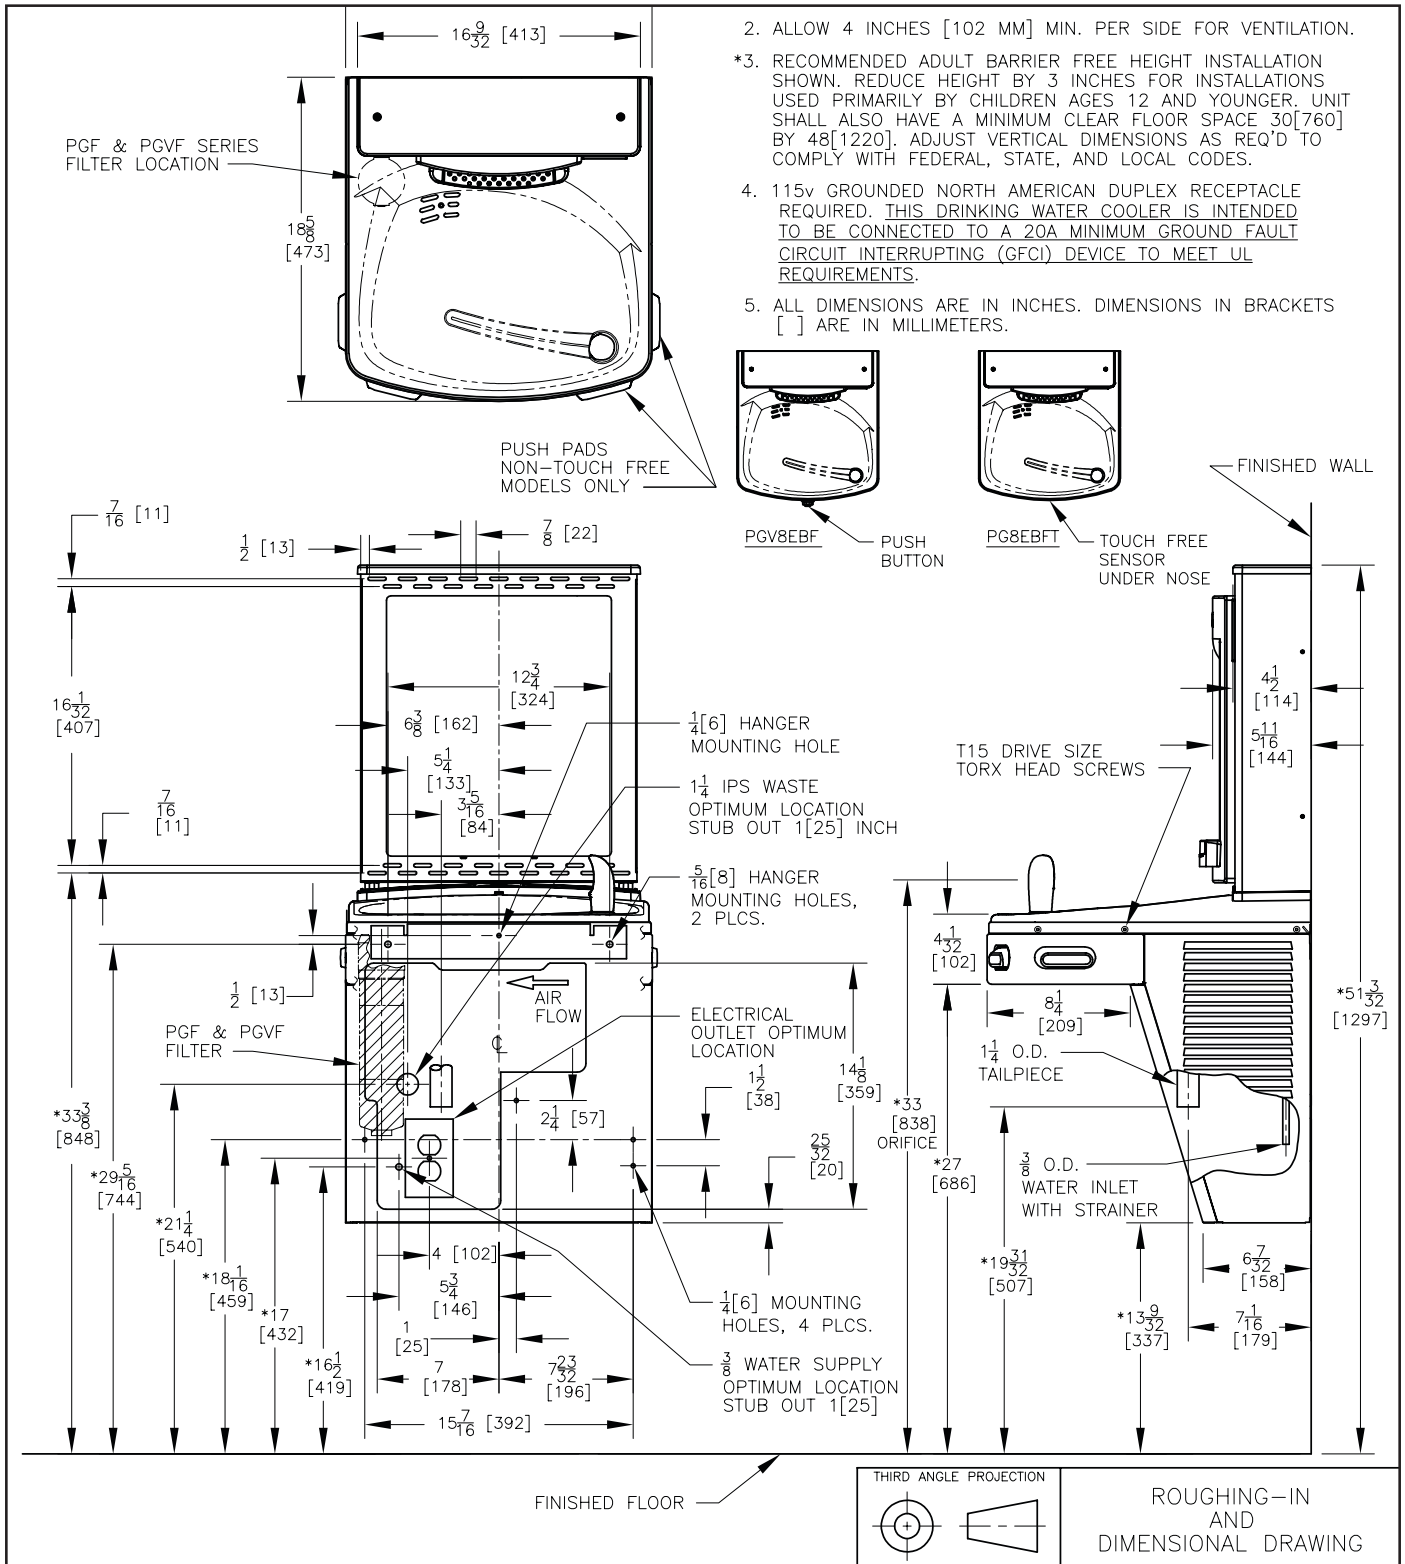

www.oasis.ie
www.oasisbottlefillers.com
info@oasis.ie

OASIS IRELAND
Bunree Industrial Estate, Ballina,
Co. Mayo, F26 D5R3, Ireland.
+353 96 71222

OASIS POLAND
ul. Gutenberga 20,
44-164, Gliwice, Poland
+48 32 332 65 01