



AQUAPOINTE MWSM12EBFY ■ Contactless, Refrigerated
AQUAPOINTE MWSM8EBFY ■ Contactless, Refrigerated
AQUAPOINTE MWSMEBFY ■ Contactless, Non-Refrigerated
 Bottle Filler

AquaPointe MWSM12EBFY

Delivering 90LPH of 10°C water at 21°C ambient.
 The cooling system uses R-134a or R-290a refrigerant.

AquaPointe MWSM8EBFY

Delivering 60LPH of 10°C water at 21°C ambient.
 The cooling system uses R-134a or R-290a refrigerant.

AquaPointe MWSMEBFY

Delivering ambient drinking water.




These surface mount, bottle fillers include an electronic sensor for a contactless (touch free) activation and a 30 second shut off timer. The Bottle Counter conveniently displays the number of times the unit has been used, encouraging the refill of sports bottles.

Key AquaPointe moulded components shall contain Freshield, which utilises a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discolouration, odours and degradation.

Complies with ANSI A117.1 and ADA. Shall comply with all relevant CE directives (LVD , EMC, RoHS). Shall comply with ANSI/NSF 61.

Suitable for public building, gymnasiums, sports complexes, hospitals, schools, and offices.

MODEL CODE	MWSM12EBFY	MWSM8EBFY	MWSMEBFY
ACTIVATION		Contactless (Infrared sensor)	
SENSOR COVERAGE		Up to 5cm (approx.)	
FILTRATION		Green Filter (optional), Built-in 100 micron strainer	
DISINFECTION		-	Quasar UVC-LED (Optional) (MWSMEBQY)
AUTO-OFF WATER FLOW		Yes	
DRAINAGE TYPE		Built in drain, Removable drip tray	
EXTERIOR CHASSIS		Antimicrobial ABS Plastic, Brushed Stainless Steel	
DIMENSIONS		Heavy Duty Galvanised Steel	
ALCOVE HEIGHT		1051(H) x 530(W) x 150(D) mm	
NET WEIGHT		265 mm	
		35 kg	12 kg
POWER SUPPLY		220-240V, 50/60 Hz	
COOLING PERFORMANCE	90 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.)	60 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.)	Non-Refrigerated
FULL LOAD AMPS	3.7A	2.2A	0.1A
RATED WATTS	627 W	347 W	7 W
COUNTRY OF ORIGIN		Mexico	
CERTIFICATIONS		ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS) , WRAS	
WARRANTY		1 Year	

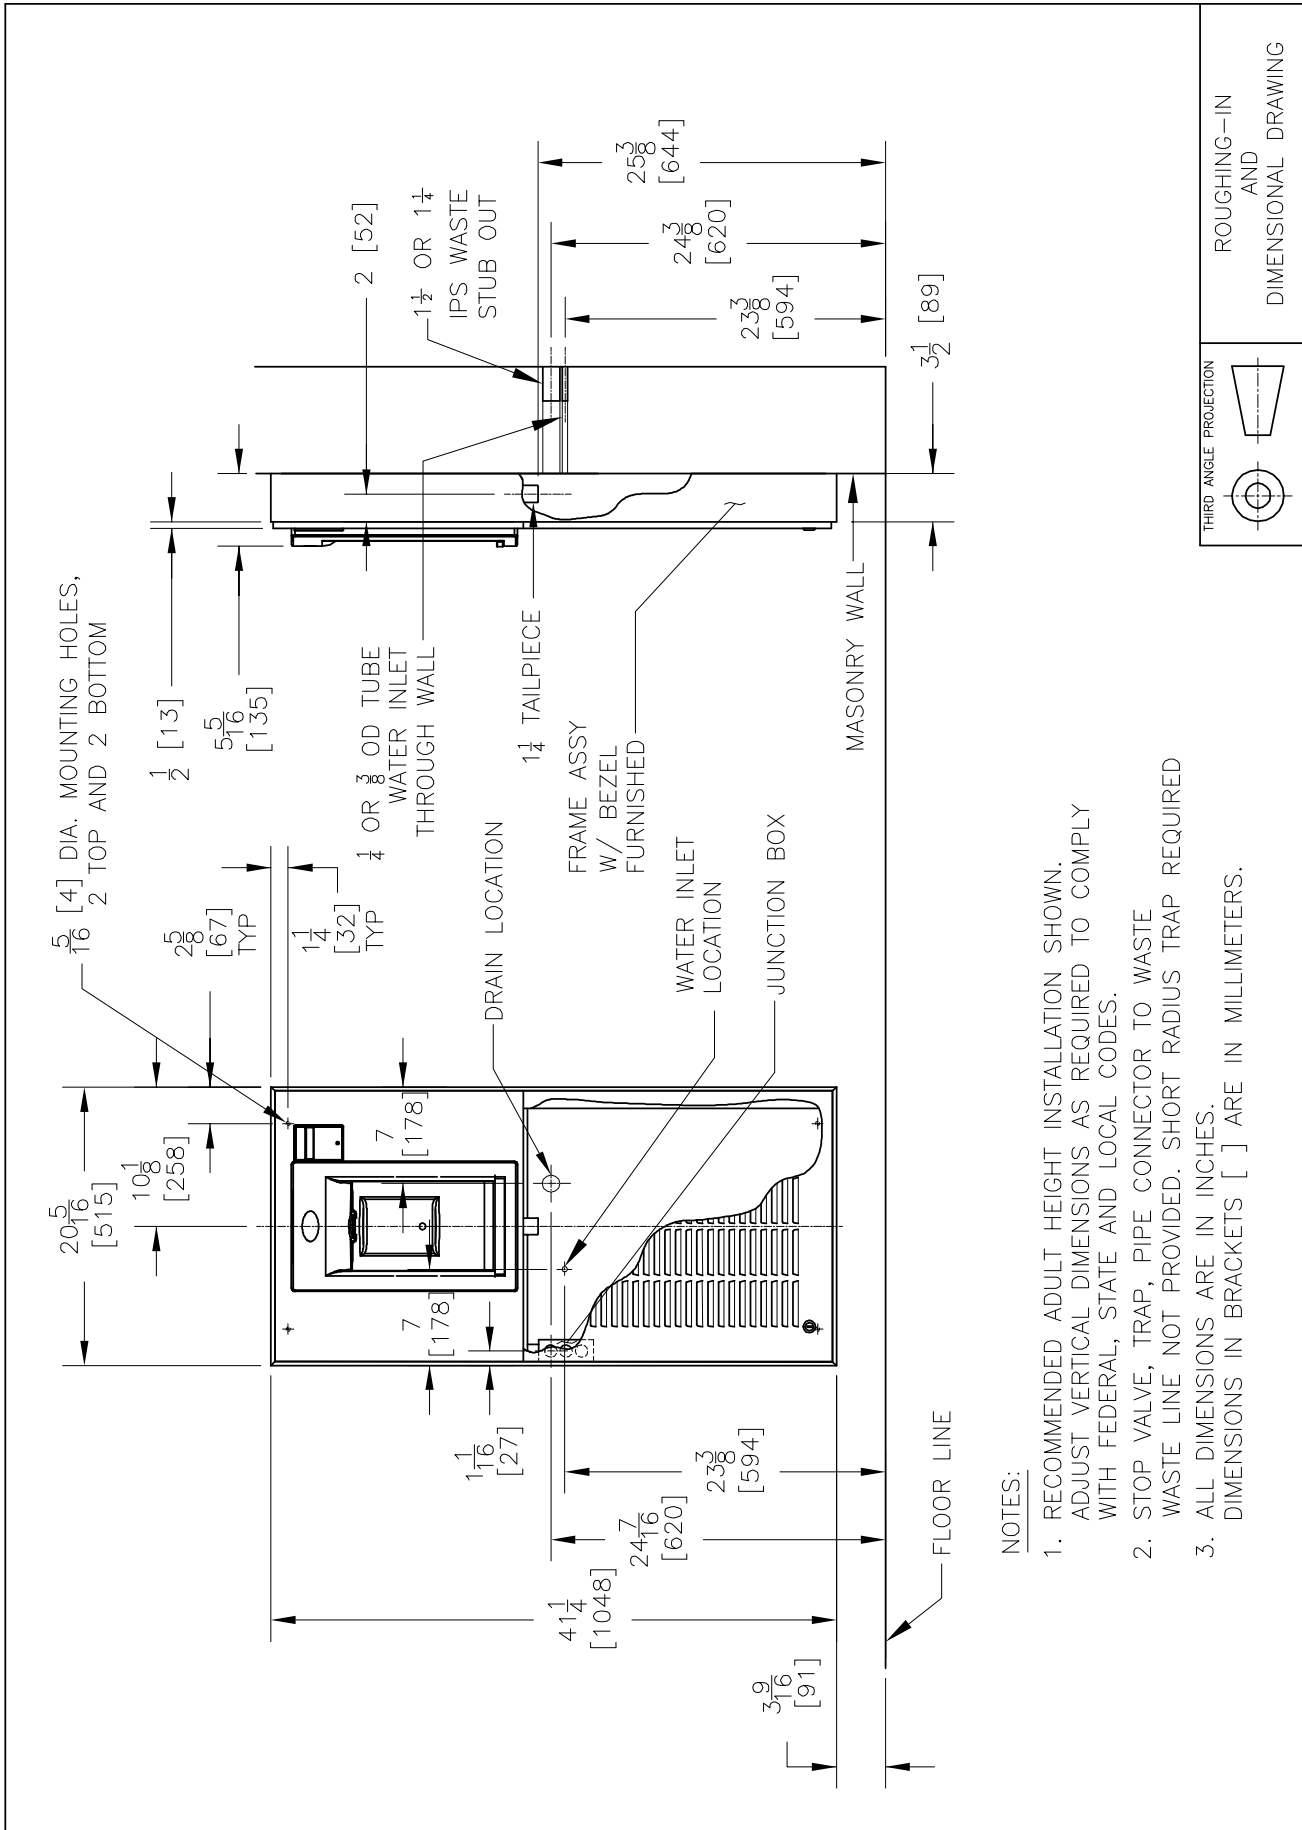

NOTES:

1. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQUIRED TO COMPLY WITH FEDERAL, STATE AND LOCAL CODES.
2. STOP VALVE, TRAP, PIPE CONNECTOR TO WASTE WASTE LINE NOT PROVIDED. SHORT RADIUS TRAP REQUIRED
3. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.

ROUGHING-IN DIMENSIONAL DRAWING



www.oasis.ie
www.oasiscoolers.com
info@oasis.ie

OASIS IRELAND
Bunree Industrial Estate, Ballina
Co. Mayo F26 D5R3 Ireland
+353 96 71222

OASIS POLAND
ul. Gutenberga 20
44-164, Gliwice, Poland
+48 32 332 65 01

