

**VERSAFILLER PEBFSLY 507042**  
Hydration Station Combo

Manual,  
Non- Refrigerated,  
Split-Level

This surface mount hydration station combo has two activation methods. The bottle filler includes an electronic sensor for a contactless (touch free) activation and a 30 second shut off timer. The drinking fountains are activated via one of four push-pads.

The Bottle Counter conveniently displays the number of times the unit has been used, encouraging the refill of sports bottles.



Key Versafiller moulded components shall contain Freshield, which utilises a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discolouration, odours and degradation.

Suitable for public building, gymnasiums, sports complexes, hospitals, schools, and offices.



MODEL CODE	PEBFSLY 507042
ACTIVATION	Bottle Filler: Contactless (Infrared sensor) Drinking Fountain: Manual (Four push-pads)
SENSOR COVERAGE	Up to 5cm (approx.)
FILTRATION	Green Filter (optional), Built-in 100 micron strainer
DISINFECTION	-
AUTO-OFF WATER FLOW	Bottle Filler: Yes ; Drinking Fountain: No
DRAINAGE TYPE	Built in drain, Removable drip tray
EXTERIOR CHASSIS	Antimicrobial ABS Plastic, Brushed Stainless Steel
DIMENSIONS	Heavy Duty Galvanised Steel
ALCOVE HEIGHT	1920(H) x 413(W) x 473(D)
NET WEIGHT	330 mm
POWER SUPPLY	22 kg
COOLING PERFORMANCE	220-240V, 50/60 Hz
FULL LOAD AMPS	-
RATED WATTS	0.1A
ENERGY SYSTEM	7 W
COUNTRY OF ORIGIN	-
CERTIFICATIONS	Mexico
WARRANTY	ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS), WRAS
	1 Year

NOTES:  
 1. TRAP, STOP VALVE AND ELECTRICAL OUTLET NOT FURNISHED.  
 2. ALLOW 4 INCHES [102 MM] MIN. PER SIDE FOR VENTILATION. PER SIDE FOR VENTILATION.  
 3. RECOMMENDED ADULT BARRIER FREE HEIGHT INSTALLATION SHOWN. REDUCE HEIGHT BY 3 INCHES FOR INSTALLATIONS USED PRIMARILY BY CHILDREN AGES 12 AND YOUNGER. UNIT SHALL ALSO HAVE A MINIMUM CLEAR FLOOR SPACE 30[760] BY 48[1220]. ADJUST VERTICAL DIMENSIONS AS REQUIRED TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.

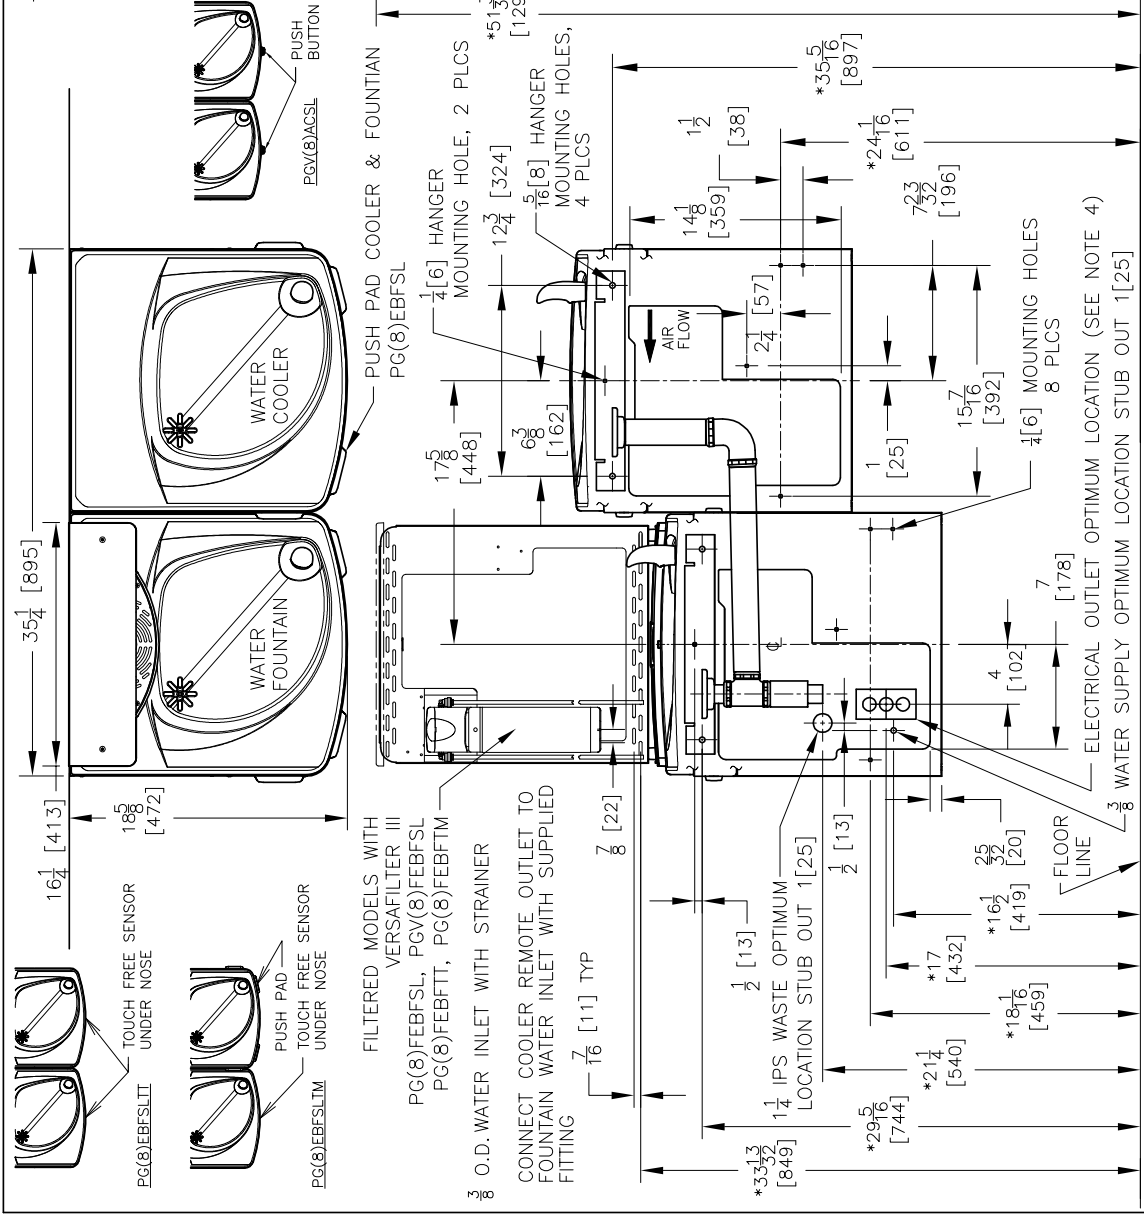

ROUGHING-IN AND DIMENSIONAL DRAWING

5. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.

4. 115v GROUND NORTH AMERICAN DUPLEX RECEPTACLE REQUIRED. THIS DRINKING WATER COOLER IS INTENDED TO BE CONNECTED TO A 20A MINIMUM GROUND FAULT CIRCUIT INTERRUPTING (GFCI) DEVICE TO MEET UL REQUIREMENTS.



www.oasis.ie  
 www.oasiscoolers.com  
 info@oasis.ie

OASIS IRELAND  
 Bunree Industrial Estate, Ballina,  
 Co. Mayo, F26 D5R3, Ireland.  
 +353 96 71222

OASIS POLAND  
 ul. Gutenberga 20,  
 44-164, Gliwice, Poland  
 +48 32 332 65 01