

UNIVERSAL RADII™ BI-LEVEL MODULAR FOUNTAIN M8CREM

Suggested Specification

Model M8CREM shall deliver 8.0 gph of 50° F degree water at 90° F ambient and 80° F inlet water. Shall include one infrared sensor activation and one antimicrobial copper push button to activate the flow of water and a low flow one piece bubbler with flexible guard. The fountains shall be designed to eliminate splashing and standing water. Water saver bubbler reduce waste water by 50% and shall have flexible guard and operate between 20 and 100 PSI. Cabinet finish shall be brushed stainless steel. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with ANSI/NSF 61 & NSF/ANSI 372.

Radii modular bi-level water cooler meets the needs of the physically challenged and the able-bodied.

Models

M8CREM: The left fountain has an infrared sensor activation, the right fountain has a manually operated copper button that requires a light press of the push pad to activate the water flow.

Standard Features

Built-in 100 micron strainer stops particles before they enter the waterway

- One antimicrobial push button and one infrared sensor activation
- Waterways are Lead-Free in materials & construction
- Flexible bubbler guard
- Brushed stainless steel finish
- · Universal design: high right or high left
- High efficiency cooling system

Finishes

• Standard cabinet finish: Stainless steel

Installation

• Prior to roughing consult with local, state and federal codes for proper mounting height

- Shipped with complete instructions
- Frame allows for universal installation

Recessed mounting frame included, but water supply and drain required



Options (at additional cost)

- Vandal resistant screw kit (036704-002)-2 required
- One piece chrome plated brass bubbler (036700-001)
- ADA Cane apron (036707-001)

Limited 5-Year Warranty

(Continental limits of the United States and Canada) Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Certifications/Compliance

• Oasis International Electric Water Coolers are listed by Underwriters Laboratories Inc. and comply with both U.S. and Canadian Requirements.

• Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act.

• This unit complies with ARI standard 1010 Testing, Operating and Rating requirements (electric water coolers only).


• These waters coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed.



Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot'N Cold	115 Volts, 60 HZ			Glass Filler	Cabinet Col-	Net Wt.
	Rated Capacity	Base Rate	Pre-Cooler	Model	Compr. HP	Full Load	Rated Watts	Acc. Option	or Finish	Approx
	GHP	GHP				Amps				
M8CREM	8.0	8.0	No	No	1/4	4.8	500	No	Yes	161 Lbs

* Industry standard rating condition 80° F inlet water temperature

Specifications subject to change without notice

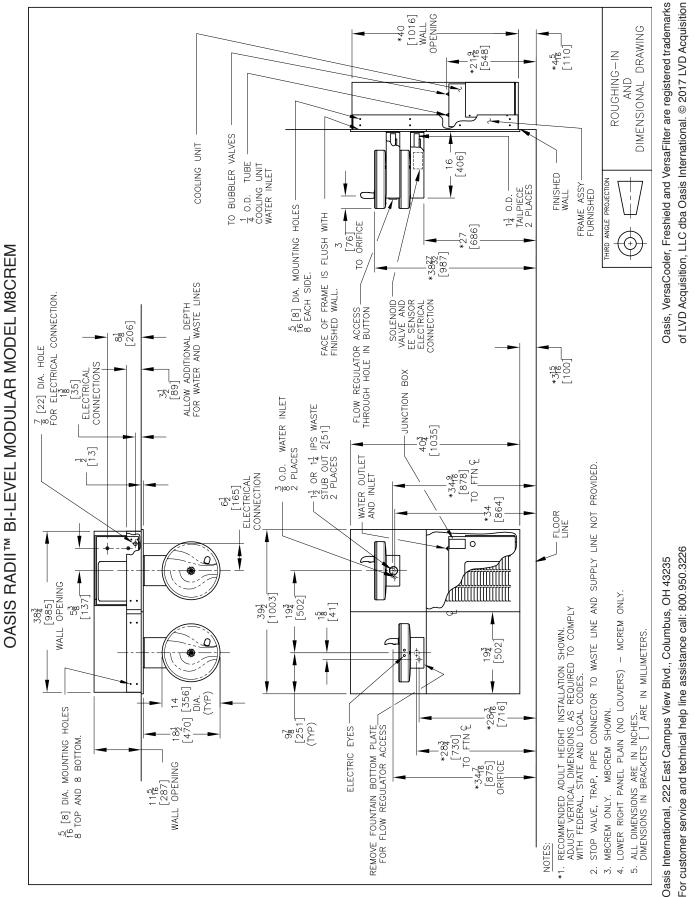

www.oasiscoolers.com

C e r t i f i e d Women's Business Enterprise