

# Technical Sheet.

## Modular Hands-Free QUASAR™ VersaFiller with VersaFilter II and Remedi Filter

MWF2EBQ

MW8F2EBQ

MW12F2EBQ

### **Suggested Specification**

Model MW8F2EBQ shall deliver 8.0 gph of 50° F degree water at 90°F ambient and 80°F inlet water per ASHRAE 18 testing. Model MW12F2EBQ shall deliver 12.0 gph of 50° F degree water at 90°F ambient and 80°F inlet water per ASHRAE 18 testing. Model MWF2EBQ is a non-refrigerated unit. Unit shall have filter monitor and bottle counter. Shall be recessed in design. Shall have VersaFilter II for lead, cyst, chlorine, taste and odor reduction.

QUASAR bottle filler shall have UVC-LED treatment at the dispense point, which disinfects the water while it is being dispensed. UVC-LED also cycles on periodically to keep the dispense point sanitized between dispenses.

Hands-free bottle filler components contain Freshield®, which utilizes a silver-based antimicrobial compound to protect the surfaces from discoloration, odors and degradation caused by the growth of microorganisms and mildew. Cabinet finish shall be brushed stainless steel. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with NSF/ANSI 61 and NSF/ANSI 372.

### **Models**

MW8F2EBQ delivers 8.0 gph of chilled drinking water. MW12F2EBQ delivers 12.0 gph of chilled drinking water. MWF2EBQ is a non-refrigerated unit.

### **Standard Features**

- Hands-free QUASAR with mercury-free UVC-LED treatment at the dispense point
- Built-in 100 micron strainer stops particles before they enter the waterway
- Waterways are Lead-Free in materials & construction
- Hands-free bottle filler with 20 second shut off, integrated bottle counter and filter monitor
- Heavy duty steel frame
- High efficiency cooling system
- Built in panel locks for easy access to chiller and filtration
- VersaFilter II is certified to NSF/ANSI 42 and 53 for lead, chlorine, taste and odor reduction to 3,000 gallons

### **Finishes**

Standard cabinet finish: Stainless steel

### Installation

- Prior to roughing consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions
- Recessed mounting frame included, but water supply and drain required



### **Limited 5-Year Warranty**

(Continental limits of the United States and Canada)

Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

### **Export Warranty**

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

### **Certifications/Compliance**

- Certified to UL 399 and CAN/CSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act
- These waters coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed
- VersaFilter is certified to NSF/ANSI 42 & 53



### WARNING:

Cancer and Reproductive Harm www.P65Warnings.ca.gov










Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot'N	115 Volts, 60 HZ			Glass	Cabinet	
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler	Cold™ Model	Compr. HP	Full Load Amps	Rated Watts	Filler Acc. Option	Color Finish	Net Wt. Approx.
MW8F2EBQ	8.0	8.0	No	No	1/4	4.8	500	No	No	86 Lbs
MW12F2EBQ	12.0	12.0	No	No	1/3	5.5	550	No	No	89 Lbs
MWF2EBQ	Electric Bottle Filler Rating Only					.40	25	No	No	35 Lbs

# Modular Hands-Free QUASAR™ VersaFiller

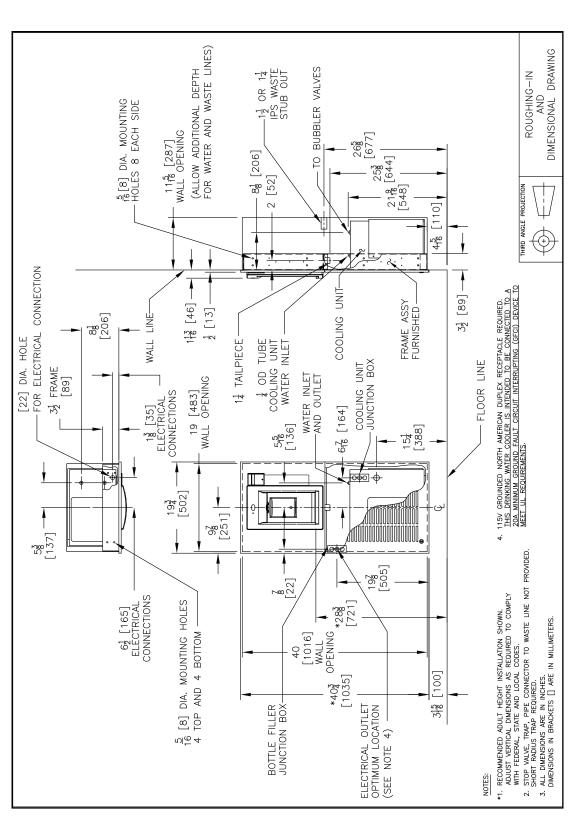



OASIS INTERNATIONAL

222 East Campus View Blvd. Columbus, OH 43235

1-800-646-2747

www.oasiscoolers.com

OASIS is a registered trademark of LVD Acquisition, LLC dba Oasis International, © 2019 LVD Acquisition AS0042-F-1912