# **POSIS**<sub>®</sub>

# We Know Water.

### COOLER TO CONTACTLESS QUASAR VERSAFILLER CONVERSION KIT WITH VERSAFILTER III • NNF2EBQPG

#### **Suggested Specification**

Installation

Locotion:

Model NNF2EBQPG shall retrofit to existing OASIS PG\*AC and P\*AC series water coolers to provide contactless activation and laminar flow. Retrofits to both single and split level models. Model NNF2EBQPG shall include the QUASAR VersaFiller® Bottle Filler. Bottle Filler alcove and cabinet finish shall be stainless steel. Key VersaFiller components contain Freshield®, which utilizes a silver-based antimicrobial compound to protect the surfaces from discoloration, odors and degradation caused by the growth of micro-organisms and mildew.

QUASAR bottle filler shall have UV-C LED treatment at the dispense point, which disinfects the water while it is being dispensed. UV-C LED also cycles on periodically to keep the dispense point sanitized between dispenses.

ween dispenses.	
Features:	Contactless QUASAR with mercury-free UV-C LED treatment at the dispense point
	<ul> <li>Waterways are lead-free in materials &amp; construction</li> </ul>
	Heavy duty galvanized steel frame
	Contactless activation bottle filler with     programmable auto shut off
	Bottle filler replaces bubbler, button     activation, existing top and front panel
	Bottle filler retro-fits to the existing water     cooler without removing it from the wall
	<ul> <li>Re-uses existing refrigeration, plumbing and power source</li> </ul>
	<ul> <li>Access through the side of the bottle filler cabinet for clean and easy replacement of filters</li> </ul>
	• Built-in filter monitor and bottle counter
	Logos permanently formed into the alcove     and stainless steel wrapper
	LED lighted alcove
	Compatible with refrigerated and non- refrigerated fountains
Filtration:	VersaFilter III is Certified to NSF/ANSI 42 and 53 for lead, Particulate Class I, chlorine, taste and odor reduction to 4,750 gallons
Power:	115 Volts, 60 Hz
Activation By:	Contactless Sensor
Mounting Type:	Wall Mounted
Chilling Option:	Utilizes existing refrigeration system if applicable
Full Load Amps:	0.4 amps
Rated Watts:	20
Approx. Net Weight:	26 lbs
lashallahia a	

Indoor

\*Drinking Fountain Not Included

#### Installation

- Prior to roughing in, consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions and wall mounting bracket

#### Limited 1-Year Warranty

(Continental limits of the United States and Canada) One year on components parts. Detailed warranty certificate enclosed with each bottle filler; sample available upon request.

#### **Export Warranty**

One year on components parts. Detailed warranty certificate enclosed with each bottle filler; sample copy available upon request.

#### Compliance


- Certified to UL 399 and CAN/CSA C22.2 No. 120
- Complies with the requirements of ADA (Americans with Disabilities Act) when properly installed





Specifications subject to change without notice

## COOLER TO CONTACTLESS QUASAR VERSAFILLER CONVERSION KIT WITH VERSAFILTER III

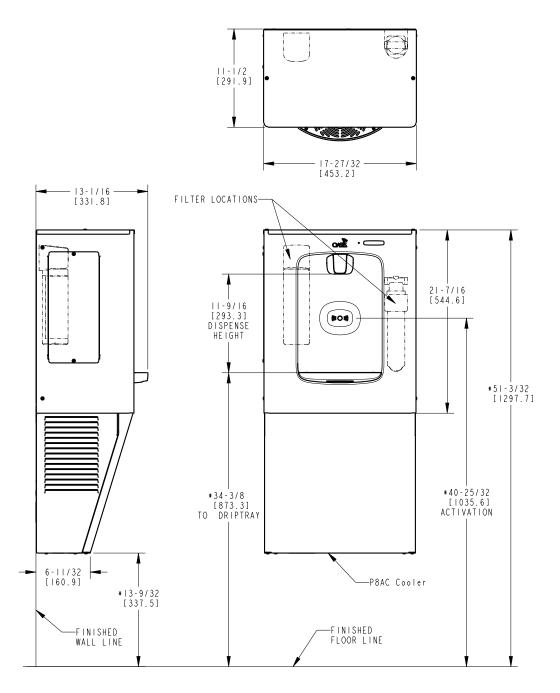

NOTES:

I. \*DIMENSIONS ARE REFERENCE ONLY.

2. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.