



We Know Water.

FREE STANDING CONTACTLESS QUASAR® BOTTLE FILLER

- **PCPI0EBQ**
- **PCPEBQ**

Suggested Specification

Model PCPI0EBQ shall deliver 10.0 gph of 50 F water at 90 F ambient and 80 F inlet water per ASHRAE 18 testing. Model PCPEBQ is a non-refrigerated bottle filler and delivers ambient water. Electronic bottle filler shall have contactless activation for the dispensing of water.

QUASAR bottle filler shall have UVC-LED treatment at the dispense point, which disinfects the water while it is being dispensed. UVC-LED also cycles on periodically to keep the dispense point sanitized between dispenses.

Plastic bottle filler components contain Freshield, which utilizes a silver-based antimicrobial compound to protect the surfaces from discoloration, odors and degradation caused by the growth of micro-organisms and mildew. Evaporator shall be high efficiency tank type and shall be encapsulated in insulation. An adjustable thermostat having an off position shall control refrigeration system. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with NSF/ANSI 61 and NSF/ANSI 372.



UVC-LED Treatment at the point-of-dispense

	PCPI0EBQ	PCPEBQ
Features:	<ul style="list-style-type: none"> • Contactless QUASAR bottle filler with mercury-free UVC-LED at the dispense point • Built-in strainer inside solenoid valve prevents particles in waterway • Waterways are lead-free in materials & construction • High efficiency cooling system • Contactless activation for water dispensing with auto shut-off • High flow output of 1.1 gallons per minute for faster fill up • Built in drain - no drip tray to empty • Removable front panel for ease of filter change-out (not included) 	
Filtration:	Option to add Versafilter Filtration System	
Power:	115 Volts, 60 Hz	
Activation By:	Contactless Sensor on Bottle Filler	
Mounting Type:	Free Standing	
Chilling Option:	10.0 gph	Non-refrigerated
Installation Location:	Indoor	

Finishes

- Standard cabinet finish: Brushed stainless steel

Options

- VersaFilter III

Limited 5-Year Warranty

(Continental limits of the United States and Canada) Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Certifications/Compliance

- Certified to UL 399 and CAN/CSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act
- These waters coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed




WARNING:
Cancer and Reproductive Harm
www.P65Warnings.ca.gov



*Industry standard rating condition at 90°F ambient, 80°F inlet water and 50°F drinking water temperature

OASIS™ FREE STANDING CONTACTLESS BOTTLE FILLER

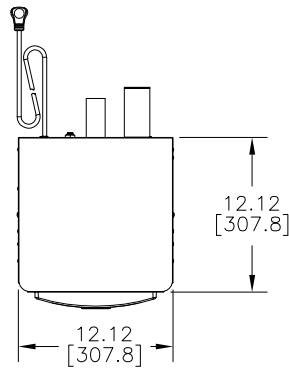


PLAN VIEW

ALL DIMENSIONS ARE IN INCHES.

DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.

ALLOW 4" [102] FOR VENTILATION AT THE REAR OF THE WATER COOLER AND THE SIDES IF SET IN AN ALCOVE OR NEAR A CORNER.

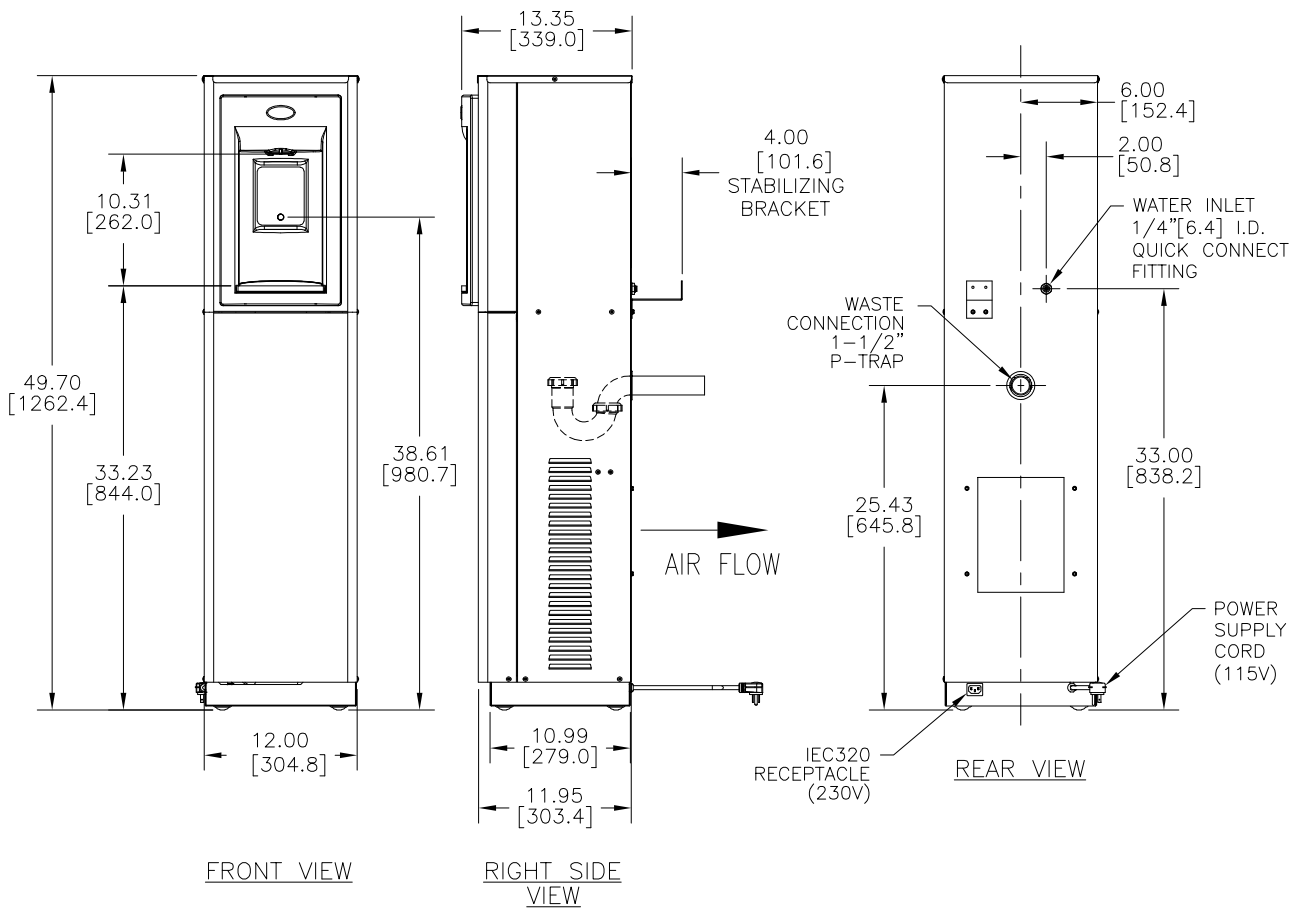

<p>THIRD ANGLE PROJECTION</p>	<p>ROUGHING-IN AND DIMENSIONAL DRAWING</p>
-------------------------------	--