



We Know Water.

## FREE STANDING CONTACTLESS OUTDOOR QUASAR® BOTTLE FILLER

### • PCPD10EBQ

#### Suggested Specification

Model PCPD10EBQ shall deliver 10.0 gph of 50°F water at 90°F ambient and 80°F inlet water per ASHRAE 18 testing. Shall be freestanding in design with contactless activation and laminar flow.

QUASAR bottle filler shall have UV-C LED treatment at the dispense point, which disinfects the water while it is being dispensed. UV-C LED also cycles on periodically to keep the dispense point sanitized between dispenses.

Key bottle filler components contain Freshield, which utilizes a silver-based antimicrobial compound to protect the surfaces from discoloration, odors and degradation caused by the growth of micro-organisms and mildew. Evaporator shall be high efficiency tank type and shall be encapsulated in insulation. An adjustable thermostat having an off position shall control refrigeration system. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with NSF/ANSI 61 and NSF/ANSI 372.

#### Features:

- Contactless QUASAR with mercury-free UV-C LED treatment at the dispense point
- Built-in 100 micron strainer stops particles before they enter the waterway
- Waterways are Lead-Free in materials & construction
- High efficiency cooling system
- High flow output of 1.1 gallons per minute for faster fill up
- Built in drain - no drip tray to empty
- Contactless activation bottle filler with programmable auto shut off
- Covered sensor reduces false activation from safety vests or other reflective surfaces
- Easy to wash, removable MERV 3 air filter
- Built-in filter monitor and bottle counter
- Removable front panel for ease of filter change-out (filter not included)

<b>Filtration:</b>	Option to add filtration
<b>Power:</b>	115 Volts, 60 Hz
<b>Activation By:</b>	Contactless Sensor on Bottle Filler
<b>Mounting Type:</b>	Free Standing
<b>Chilling Option:</b>	10.0 gph*
<b>Full Load Amps:</b>	5.0 amps
<b>Rated Watts:</b>	500
<b>Approx. Net Weight:</b>	72 lbs
<b>Installation Location:</b>	Indoor/Outdoor

When used or stored in non-temperature controlled environments, the unit must be adequately winterized and/or protected from extreme heat to prevent damage.

\*Industry standard rating condition at 90°F ambient, 80°F inlet water and 50°F drinking water temperature



UV-C LED Treatment at the point-of dispense

#### Installation

- Shipped with complete instructions
- Mounting brackets provided

#### Finishes

- Standard cabinet finish: Stainless steel

#### Options

- OASIS VersaFilter III Kit 041253-001\*\*
- Remedi Filter\*\*

#### Limited 5-Year Warranty


(Continental limits of the United States and Canada) Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

#### Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.


#### Certifications/Compliance

- Certified to UL 399 and CAN/CSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act
- These water coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed



Specifications subject to change without notice  
\*\*Filters are not rated for outdoor use

# FREE STANDING CONTACTLESS OUTDOOR QUASAR® BOTTLE FILLER

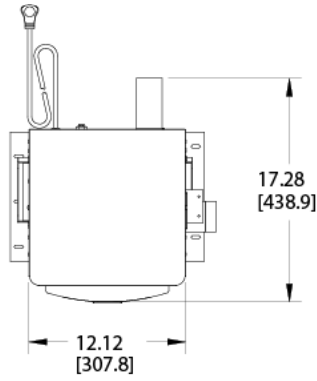

PLAN VIEW

ALL DIMENSIONS ARE IN INCHES.

DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.

ALLOW 4" [102] FOR VENTILATION AT THE REAR OF THE WATER COOLER AND THE SIDES IF SET IN AN ALCOVE OR NEAR A CORNER.

