



Technical Sheet

14 Gauge Vandal Resistant Barrier-Free VersaCooler® II

- PGV8AC-14G
- PGVAC-14G

Suggested Specification

Model PGV8AC-14G shall deliver 8.0 gph of 50° F degree water at 90° F ambient and 80° F inlet water per ASHRAE 18 testing. Cabinet & basin shall be 14 gauge stainless steel, with a heavy duty galvanized frame, with galvanized steel screens to prevent objects from being inserted into ventilation panels or underside of unit. Unit shall include a single vandal resistant push button to activate the flow of water. One-Piece low flow vandal resistant chrome plated solid construction bubbler keyed into place to prevent vandalism. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with NSF/ANSI 61 and NSF/ANSI 372.



Models

- PGV8AC-14G delivers 8.0 gallons of chilled drinking water per hour
- PGVAC-14G is a non-refrigerated fountain

Standard Features

- Built-in 100 micron strainer stops particles before they enter the waterway
- Waterways are lead free in materials & construction
- 14 gauge stainless steel construction
- One-piece vandal resistant bubbler keyed into position
- Single vandal resistant mechanical activation
- Stream height adjustment
- High efficiency cooling tank

Finishes

- Standard cabinet finish: Stainless steel

Installation

- Prior to roughing, consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions
- Removable front panel provides access for installation

Options

- Oasis filtration system
- Bronze Finish
- Non-Refrigerated Unit PVAC-14G available on request

Limited 5-Year Warranty

(Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty

One year on the sealed refrigeration systems and most component parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Certifications/Compliance

- Certified to UL 399 and CAN/CSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act.
- These water coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed.
- This unit is rated for outdoor use when properly installed.



WARNING:
Cancer and Reproductive Harm
www.P65Warnings.ca.gov




Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot 'N Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PGV8AC-14G	8.0	8.0	No	No	1/4	4.6	460	No	No	75 Lbs
PGVAC-14G	Fountain Only							No	No	?? Lbs

*Industry standard rating condition 80° F inlet water temperature

Specifications subject to change without notice

OASIS® VERSACOOLER® II MODELS

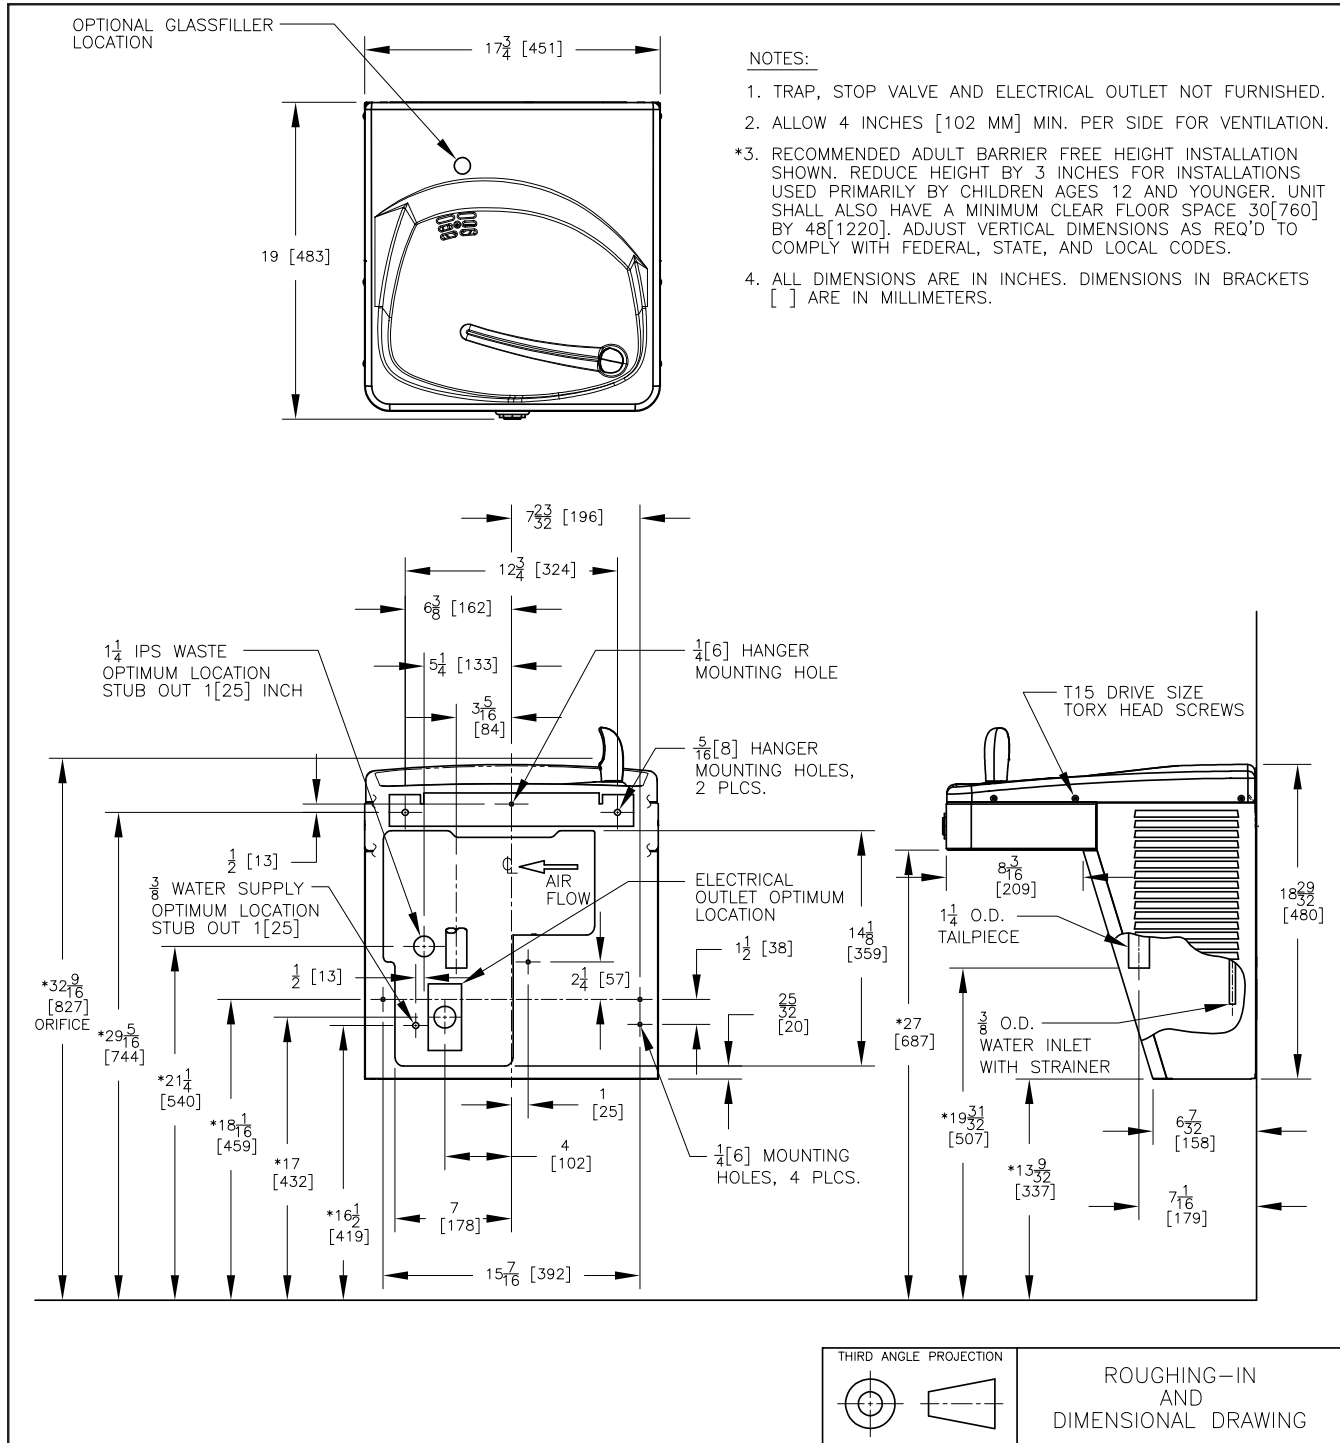

OASIS INTERNATIONAL

www.oasiscoolers.com

222 East Campus View Blvd.
Columbus, OH 43235

1-800-646-2747