



# Technical Sheet

## 14 Gauge Vandal Resistant Universal Barrier-Free VersaCooler® II

- PGV8ACSL-14G
- PGVACSL-14G

### Suggested Specification

PGV8ACSL-14G shall deliver 8.0 gph of 50° F water at 90° F ambient and 80° F inlet water per ASHRAE 18 testing. Cabinet and top basin shall be 14 gauge stainless steel, with a heavy duty galvanized frame, with galvanized steel screens to prevent objects from being inserted into ventilation panels or underside of unit. Unit shall include a single vandal resistant push button to activate the flow of water. One-piece low flow vandal resistant chrome plated solid construction bubbler keyed into place to prevent vandalism. Cooling system shall use R-134a refrigerant, shall comply with ANSI A117.1 and ADA, listed by UL to U.S. and Canadian Standards, and NSF/ANSI 61 and NSF/ANSI 372.

### Models

- PGV8ACSL-14G delivers 8.0 gallons of chilled drinking water per hour
- PGVACSL-14G is a non-refrigerated fountain

### Standard Features

- Built-in 100 micron strainer stops particles before they enter the waterway
- Waterways are lead free in materials & construction
- 14 gauge Stainless Steel construction
- One-piece vandal resistant bubbler keyed into position
- Single vandal resistant mechanical activation
- Stream height adjustment

### Finishes

- Standard cabinet finish: Stainless steel

### Installation

- Prior to roughing, consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions
- Removable front panel provides access for installation

### Options

- Versafilter

### Limited 5-Year Warranty

(Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.



Models can be installed left high and right low or right high and left low

### Export Warranty

One year on the sealed refrigeration systems and most component parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

### Certifications/Compliance

- Certified to UL 399 and CAN/CSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act.
- These water coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed.
- This unit is rated for outdoor use when properly installed.



**WARNING:**  
Cancer and Reproductive Harm  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)




Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot'N Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PGV8ACSL-14G	8.0	8.0	No	No	1/4	4.6	460	No	No	75 Lbs
PGVACSL-14G	Fountain Only							No	No	?? Lbs


\*Industry standard rating condition 80° F inlet water temperature

Specifications subject to change without notice

# OASIS® BI-LEVEL VERSACOOLER® II MODELS

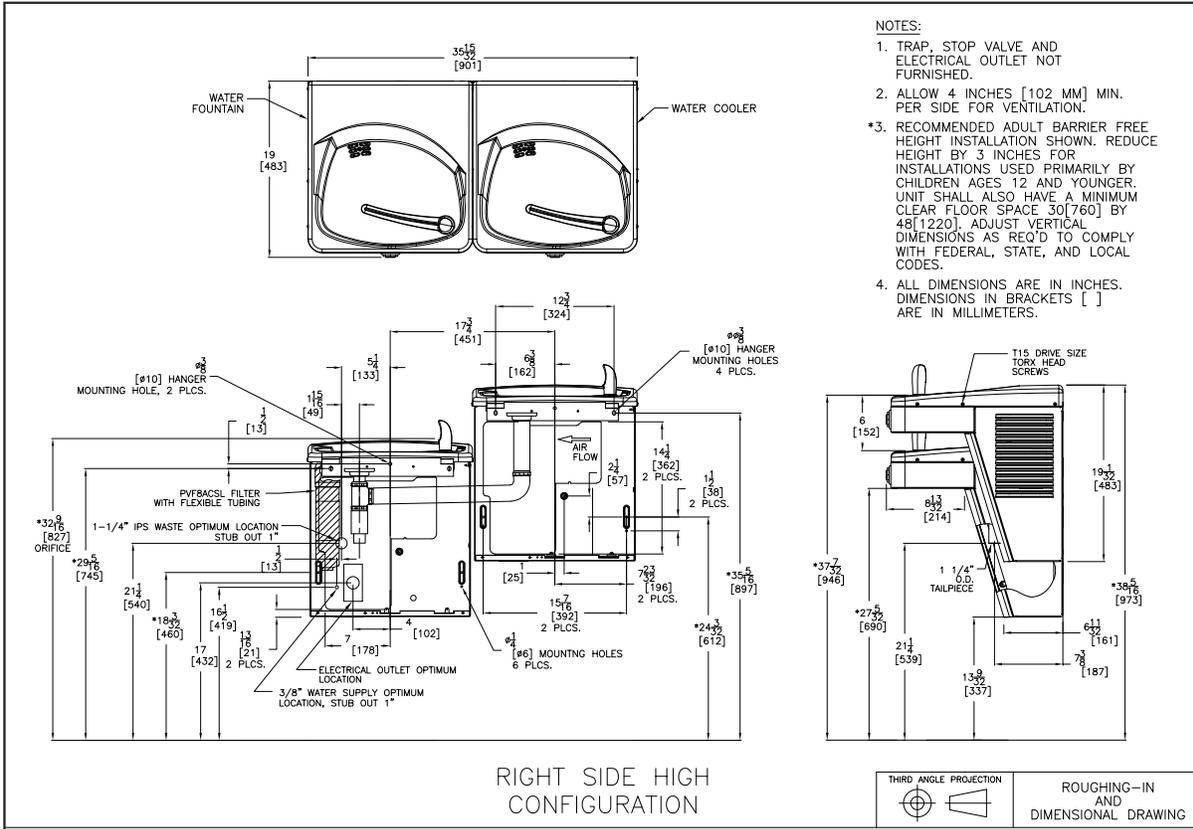

- NOTES:
1. TRAP, STOP VALVE AND ELECTRICAL OUTLET NOT FURNISHED.
  2. ALLOW 4 INCHES [102 MM] MIN. PER SIDE FOR VENTILATION.
  3. RECOMMENDED ADULT BARRIER FREE HEIGHT INSTALLATION SHOWN. REDUCE HEIGHT BY 3 INCHES FOR INSTALLATIONS USED PRIMARILY BY CHILDREN AGES 12 AND YOUNGER. UNIT SHALL ALSO HAVE A MINIMUM CLEAR FLOOR SPACE 30[760] BY 48[1220]. ADJUST VERTICAL DIMENSIONS AS REQ'D TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.
  4. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.

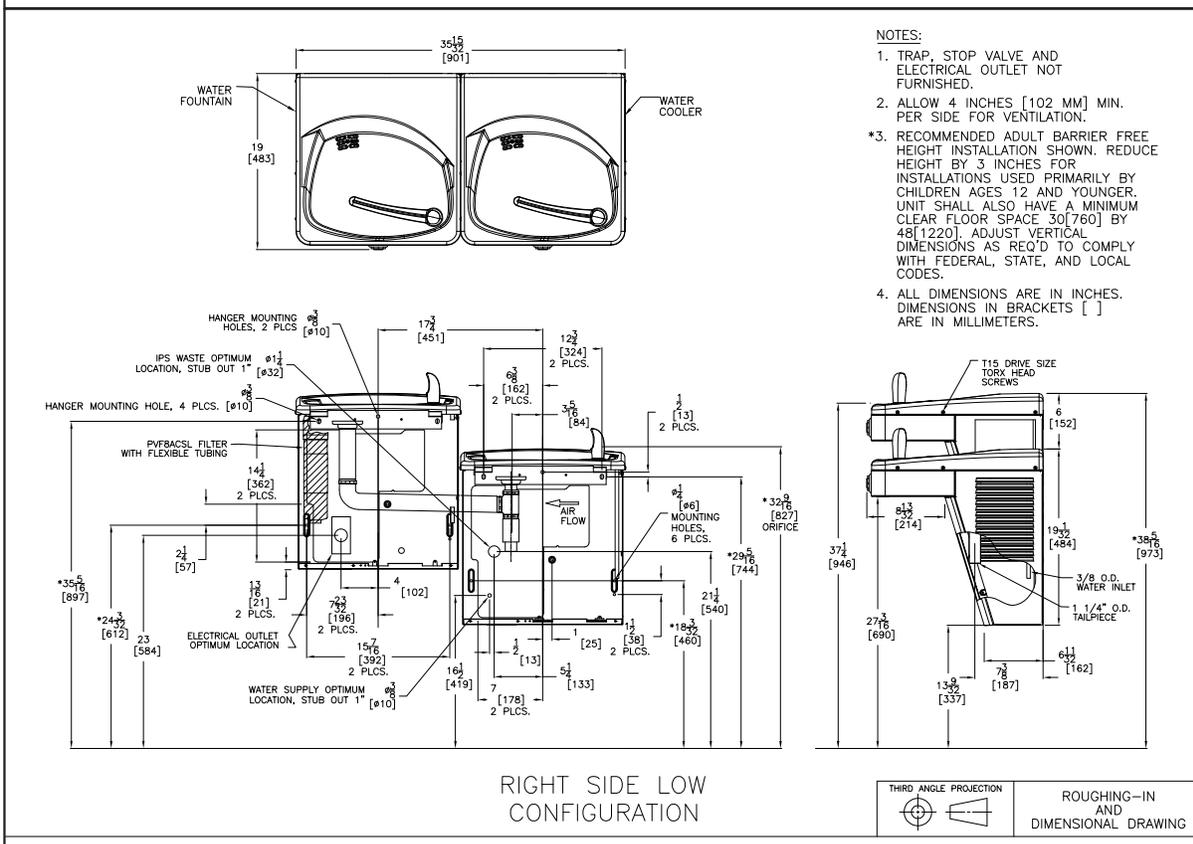

- NOTES:
1. TRAP, STOP VALVE AND ELECTRICAL OUTLET NOT FURNISHED.
  2. ALLOW 4 INCHES [102 MM] MIN. PER SIDE FOR VENTILATION.
  3. RECOMMENDED ADULT BARRIER FREE HEIGHT INSTALLATION SHOWN. REDUCE HEIGHT BY 3 INCHES FOR INSTALLATIONS USED PRIMARILY BY CHILDREN AGES 12 AND YOUNGER. UNIT SHALL ALSO HAVE A MINIMUM CLEAR FLOOR SPACE 30[760] BY 48[1220]. ADJUST VERTICAL DIMENSIONS AS REQ'D TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.
  4. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.



OASIS INTERNATIONAL

[www.oasiscoolers.com](http://www.oasiscoolers.com)

222 East Campus View Blvd.  
Columbus, OH 43225

1-800-646-2747