



Suggested Specification

VersaFiller alcove and cabinet shall be stainless steel. Key VersaFiller components contain Freshield®, which utilizes a silver-based antimicrobial compound to protect the surfaces from discoloration, odors and degradation caused by the growth of micro-organisms and mildew. Shall be surface mount in design. Unit shall include filter monitor and bottle counter.

QUASAR bottle filler shall have UV-C LED treatment at the dispense point, which disinfects the water while it is being dispensed. UV-C LED also cycles on periodically to keep the dispense point sanitized between dispenses.

Shall comply with ANSI 117.1 and ADA. Units also meet guidelines for children's accessibility providing the floor to bubbler orifice height is 30 inches and proper clear floor space is provided for frontal approach Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with NSF/ANSI 61 and NSF/ANSI 372.

- Features:**
- Contactless QUASAR with mercury-free UV-C LED treatment at the dispense point
 - Built-in 100 micron strainer stops particles before they enter the waterway
 - Waterways are lead-free in materials & construction
 - Low profile design saves space
 - Heavy duty galvanized steel frame
 - Contactless activation bottle filler with programmable auto shut off
 - Built-in filter monitor and bottle counter
 - Logos permanently formed into the alcove and stainless steel wrapper
 - LED lighted alcove
 - Surface mount frame assembly

Filtration:	Option to add filtration
Power:	115 Volts, 60 Hz
Activation By:	Contactless Sensor
Mounting Type:	Wall Mounted
Chilling Option:	Non-refrigerated
Full Load Amps	0.4 amps
Rated Watts	20
Approx. Net Weight	16 lbs
Installation Location:	Indoor

Note: Chiller units sold for these models must be remotely located, as they do not fit into the housing of the unit, or inside the wall cavity of typical stud wall.

MODEL: _____ QTY: _____

PROJECT: _____

CONTACT: _____

NOTES: _____

APPROVAL: _____ DATE: _____

SURFACE MOUNT QUASAR ELECTRONIC BOTTLE FILLER, NON-REFRIGERATED MODEL PWSMEBQ



Ships in one box.

Installation

- Prior to rough-in consult with local, state, and federal codes for proper mounting height.
- Surface mount frame included, but water supply and drain required
- Shipped with complete instructions and wall mounting brackets.

Finishes

- Standard cabinet finish: Stainless steel

Limited 1-Year Warranty

(Continental limits of the United States and Canada) One year on bottle fillers and electrical components. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Certifications/Compliance

- Certified to UL 399 and CAN/CSA C22.2 No.120 (electric water coolers only)
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for "Lead Free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act
- These waters coolers comply with the requirements of ADA (Americans with Disabilities Act) when properly installed



WARNING: Cancer and Reproductive Harm www.P65Warnings.ca.gov



Specifications subject to change without notice



SURFACE MOUNT QUASAR ELECTRONIC
BOTTLE FILLER, NON-REFRIGERATED
MODEL PWSMEBQ

Accessories



Oasis VersaFilter III & Remedi Universal Retrofit Kit

OASIS Item #41253-002

- Add dual filtration to your unit - retrofit into all OASIS fountains and bottle fillers. VersaFilter III certified to NSF/ANSI 42 and 53 for lead, cyst, Particulate Class I, chlorine, taste and odor reduction to 4,750 gallons.



Remote Chiller

R5 Chiller, OASIS Item # 502990

R8 Chiller, OASIS Item # 502991


R12 Chiller, OASIS Item # 502993



[View all filters and accessories](#)



SURFACE MOUNT QUASAR ELECTRONIC
BOTTLE FILLER, NON-REFRIGERATED
MODEL PWSMEBQ

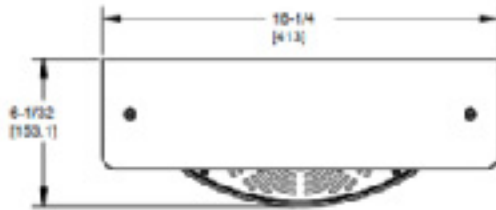

NOTES:

1. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQUIRED TO COMPLY WITH FEDERAL, STATE AND LOCAL CODES.
2. 3/8" O.D. WATER INLET WITH STRAINER PROVIDED.
3. STOP VALVE, TRAP, PIPE CONNECTOR TO WASTE LINE AND 5/8" COMPRESSION FITTING NOT PROVIDED.
4. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.

