



Service Bulletin

10/13/17

Cleaning the Faucet Assembly on the Mirage


Unplug unit from electrical power and drain the reservoir through the faucets. Remove the two screws in the back of the top and set aside. Pull down rod from the top bracket and pull forward to disengage from the button assembly.



Unscrew the bonnet assembly from the faucet body and pull up firmly to dislodge.



Wipe off seal and faucet body for any debris or residue with soft cloth and reassemble.

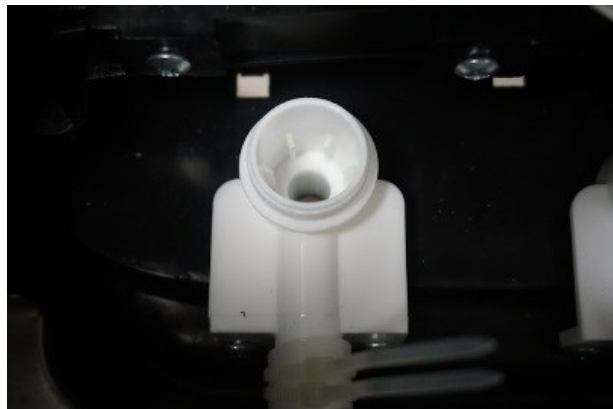

222 East Campus View Blvd | Columbus, Ohio 43235

614.861.1350 | 800.646.2747

oasiscoolers.com

