



## M8CRSBFY ■ Manual, Refrigerated, Split-Level Hydration Station Combo

This surface mount hydration station combos is manually activated. The bottle filler requires a push of the touch-button, while the drinking fountains are activated via the push-buttons.


Key moulded components shall contain Freshield, which utilises a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discolouration, odours and degradation.

Suitable for public building, gymnasiums, sports complexes, hospitals, schools, and offices.

The cooling system uses R-134a or R-290a refrigerant.



MODEL CODE	M8CRSBFY
ACTIVATION	Bottle Filler: Manual (Touch-button) Drinking Fountain: Manual (Push-button)
FILTRATION	Green Filter (optional), Built-in 100 micron strainer
AUTO-OFF WATER FLOW	No
DRAINAGE TYPE	Built in drain, Removable drip tray
EXTERIOR CHASSIS DIMENSIONS	Antimicrobial ABS Plastic, Brushed Stainless Steel Heavy Duty Galvanised Steel 1035(H) x 1003(W) x 483(D) (287 recessed)
ALCOVE HEIGHT	265 mm
NET WEIGHT	82 kg
POWER SUPPLY	220-240V, 50/60 Hz
COOLING PERFORMANCE	60 LPH Rated Capacity & Base Rate (10°C in 21°C amb. temp.)
FULL LOAD AMPS	2.2A
RATED WATTS	340 W
ENERGY SYSTEM	Refrigeration is on only when in use or if water temp increases during long period of standby.
COUNTRY OF ORIGIN	Mexico
CERTIFICATIONS	ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS) , WRAS
WARRANTY	1 Year

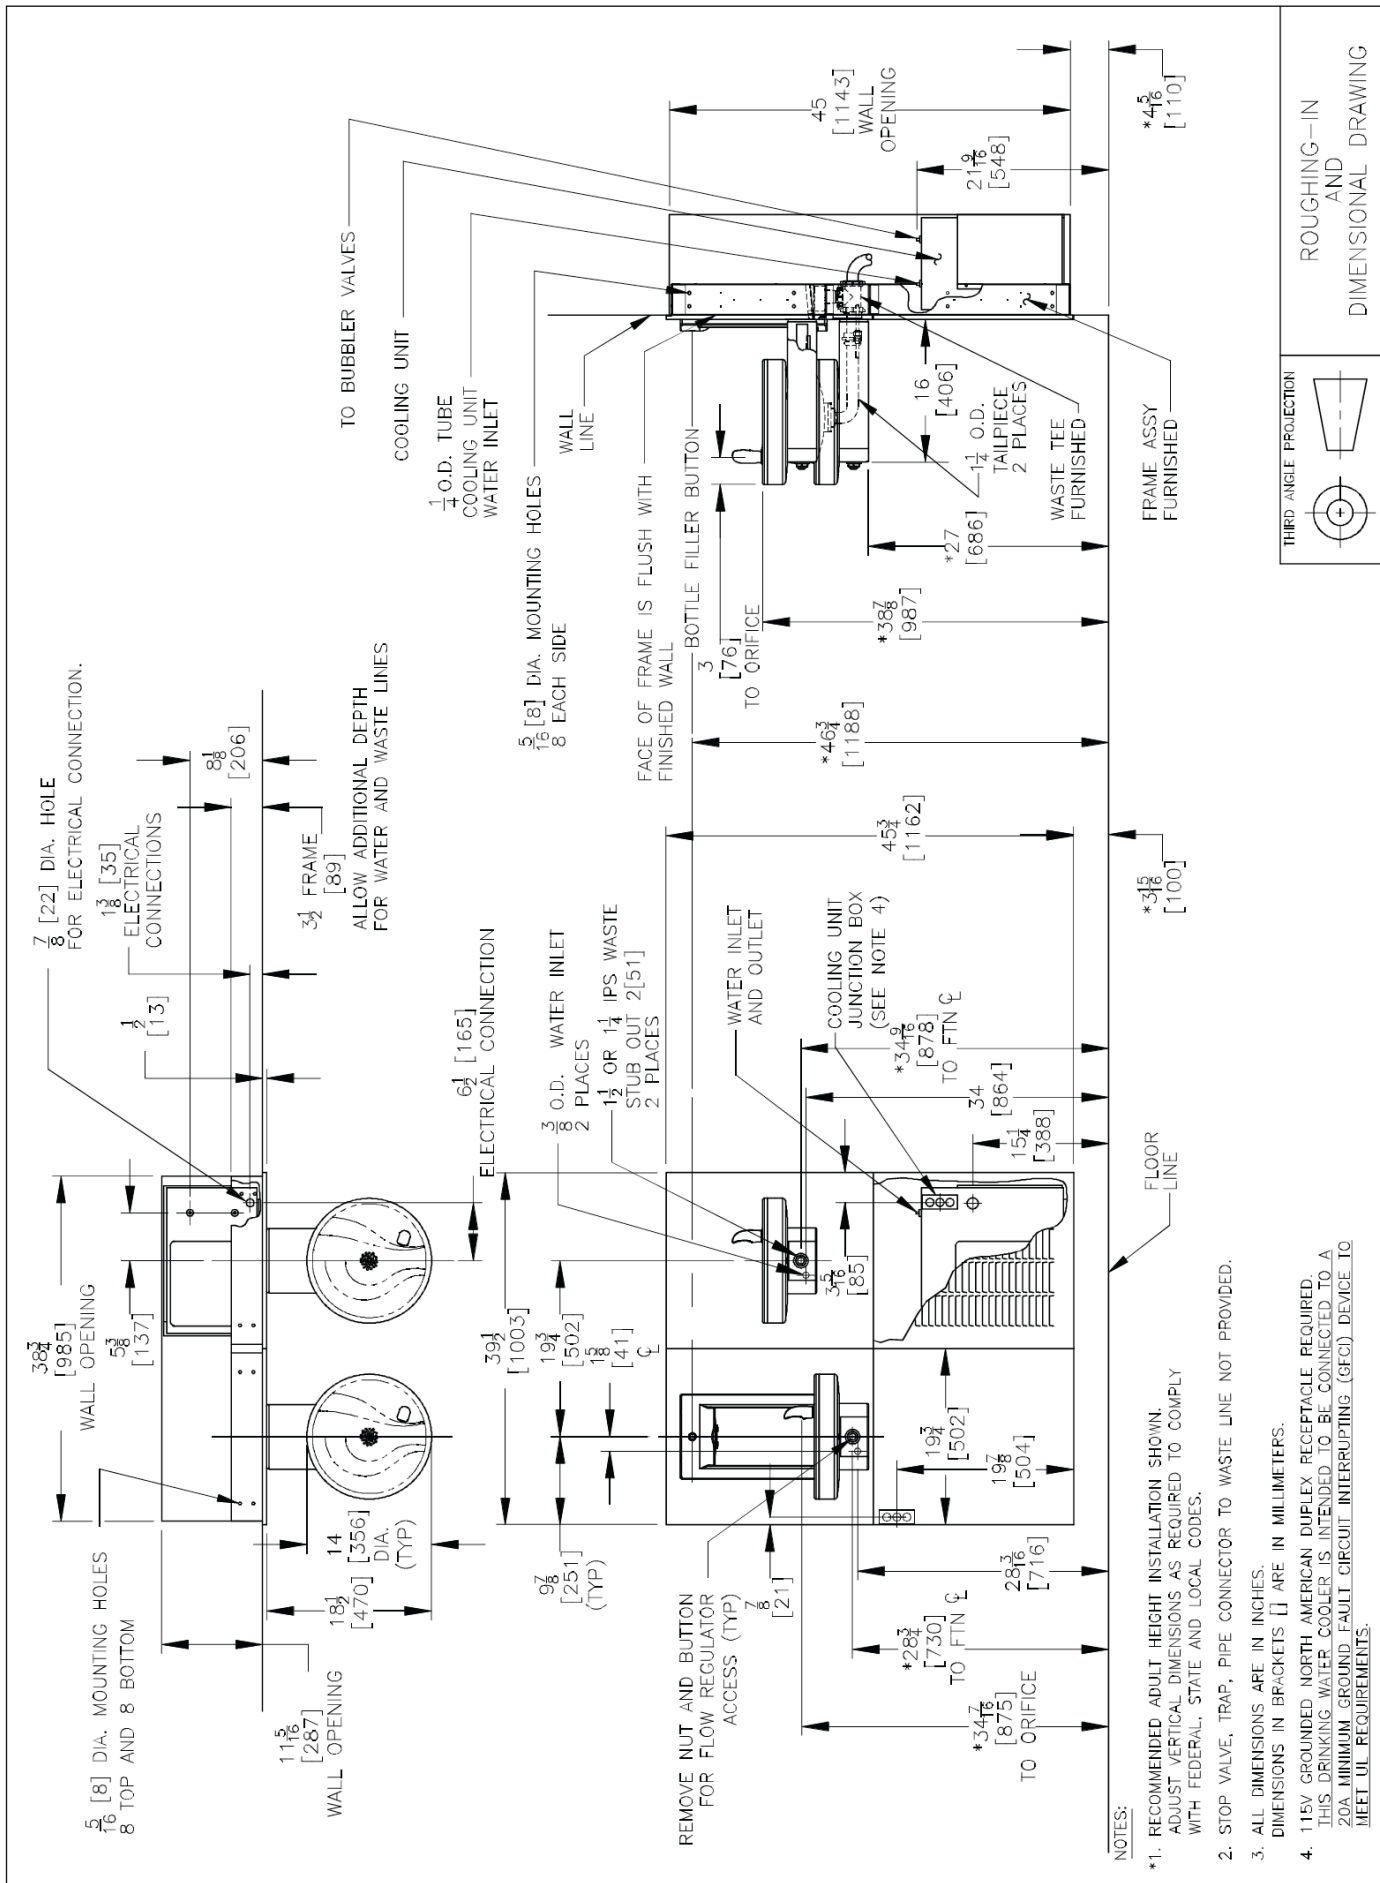

- NOTES:
- \*1. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQUIRED TO COMPLY WITH FEDERAL, STATE AND LOCAL CODES.
  - \*2. STOP VALVE, TRAP, PIPE CONNECTOR TO WASTE LINE NOT PROVIDED.
  - \*3. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.
  - \*4. 115V GROUNDED NORTH AMERICAN DUPLEX RECEPTACLE REQUIRED. THIS DRINKING WATER COOLER IS INTENDED TO BE CONNECTED TO A 20A MINIMUM GROUND FAULT CIRCUIT INTERRUPTING (GFCI) DEVICE TO MEET UL REQUIREMENTS.

ROUGHING-IN AND DIMENSIONAL DRAWING

THIRD ANGLE PROJECTION



www.oasis.ie  
www.oasiscoolers.com  
info@oasis.ie

OASIS IRELAND  
Bunree Industrial Estate, Ballina  
Co. Mayo F26 D5R3 Ireland  
+353 96 71222

OASIS POLAND  
ul. Gutenberga 20  
44-164, Gliwice, Poland  
+48 32 332 65 01