



**VERSAFILLER P8EBFSLY**

Contactless + Manual, Refrigerated, Split-Level

**VERSAFILLER PEBFSLY**

Contactless + Manual, Non-Refrigerated, Split-Level

Hydration Station Combo

**Versafiller P8EBFSLY**

Delivering 60LPH of 10°C water at 21°C ambient.  
The cooling system uses R-134a or R-290a refrigerant.

**Versafiller PEBFSLY**

Delivering ambient drinking water.

These surface mount hydration station combos have two activation methods. The bottle filler includes an electronic sensor for a contactless (touch free) activation and a 30 second shut off timer. The drinking fountains are activated via one of four push-pads.


The Bottle Counter conveniently displays the number of times the unit has been used, encouraging the refill of sports bottles.

Key Versafiller moulded components shall contain Freshield, which utilises a silver-based antimicrobial compound that reduces the growth of micro-organisms and mildew to protect the surfaces from discolouration, odours and degradation.

Suitable for public building, gymnasiums, sports complexes, hospitals, schools, and offices.



MODEL CODE	P8EBFSLY	PEBFSLY
ACTIVATION	Bottle Filler: Contactless (Infrared sensor) Drinking Fountain: Manual (Four push-pads)	
SENSOR COVERAGE	Up to 5cm (approx.)	
FILTRATION	Green Filter (optional), Built-in 100 micron strainer	
AUTO-OFF WATER FLOW	Bottle Filler: Yes ; Drinking Fountain: No	
DRAINAGE TYPE	Built in drain, Removable drip tray	
EXTERIOR CHASSIS	Antimicrobial ABS Plastic, Brushed Stainless Steel	
DIMENSIONS	Heavy Duty Galvanised Steel	
ALCOVE HEIGHT	960(H) x 895(W) x 473(D)	
NET WEIGHT	43 kg	27 kg
POWER SUPPLY	220-240V, 50/60 Hz	
COOLING PERFORMANCE	60 LPH Rated Capacity & 30 LPH Base Rate (10°C in 21°C amb. temp.)	
FULL LOAD AMPS	2.2A	0.1A
RATED WATTS	457 W	7 W
ENERGY SYSTEM	Refrigeration is on only when in use or if water temp increases during long period of standby.	Non-Refrigerated
COUNTRY OF ORIGIN	Mexico	
CERTIFICATIONS	ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS) , WRAS	
WARRANTY	1 Year	

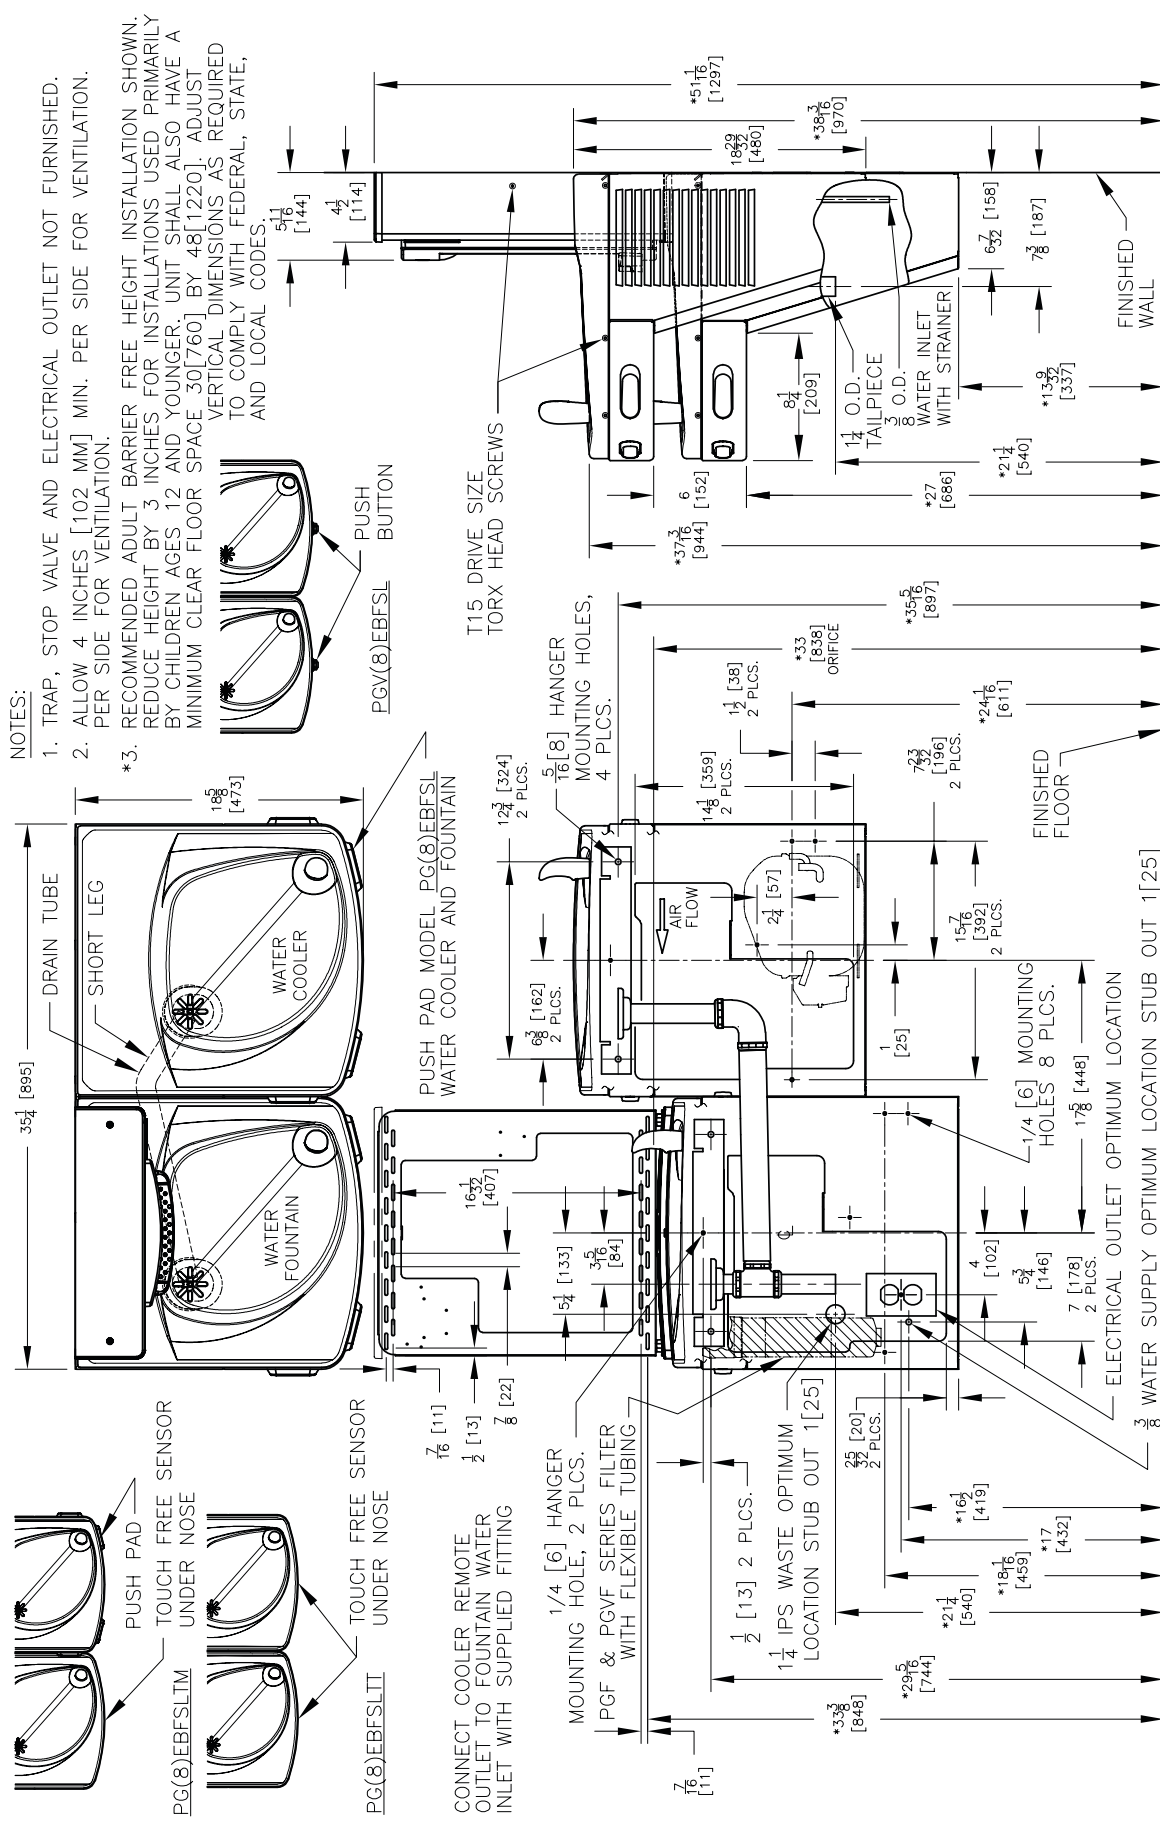


NOTES:

1. TRAP, STOP VALVE AND ELECTRICAL OUTLET NOT FURNISHED.
2. ALLOW 4 INCHES [102 MM] MIN. PER SIDE FOR VENTILATION. PER SIDE FOR VENTILATION.
- \*3. RECOMMENDED ADULT BARRIER FREE HEIGHT INSTALLATION SHOWN. REDUCE HEIGHT BY 3 INCHES FOR INSTALLATIONS USED PRIMARILY BY CHILDREN AGES 12 AND YOUNGER. UNIT SHALL ALSO HAVE A MINIMUM CLEAR FLOOR SPACE 30[760] BY 48[1220]. ADJUST VERTICAL DIMENSIONS AS REQUIRED TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.

4. 115V GROUNDED NORTH AMERICAN DUPLEX RECEPTACLE REQUIRED. THIS DRINKING WATER COOLER IS INTENDED TO BE CONNECTED TO A 20A MINIMUM GROUND FAULT CIRCUIT INTERRUPTING (GFCI) DEVICE TO MEET UL REQUIREMENTS.

5. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.



THIRD ANGLE PROJECTION  
ROUGHING-IN AND DIMENSIONAL DRAWING



www.oasis.ie  
www.oasiscoolers.com  
info@oasis.ie

OASIS IRELAND  
Bunree Industrial Estate, Ballina  
Co. Mayo F26 D5R3 Ireland  
+353 96 71222

OASIS POLAND  
ul. Gutenberga 20  
44-164, Gliwice, Poland  
+48 32 332 65 01

